



[www.superbiketool.com](http://www.superbiketool.com)



SUPER B PRECISION TOOLS CO., LTD.  
TEL:886-4-8922207 FAX:886-4-8911851  
E-mail:superb@superbiketool.com  
cindy@superbiketool.com

No. 142, Aly. 42, Ln. 82, Sec. 4, Zhangshui Rd., Pitou Township, Changhua County 523010, Taiwan (R.O.C.)

2022/3



**SUPER B**<sup>®</sup>  
tool excellence



**TOOL EXCELLENCE** UNIQUE INTELLIGENT ERGONOMIC

2023

SUPER B TOOL EXCELLENCE CATALOGUE

Make You a Bike Master



since 1990

Since 1990, Super B has been providing the best bike tools and bike repair service to various users in the bike industry. From the beginning, we are a group who love to ride a bike and enjoy repair bike by ourselves. Therefore, we put our passion into making good bike tools to improve our repairing efficiency.

Until today, Super B has spread this spirit to the world, including of bike shops, professional mechanics, home mechanics and athlete. In order to provide the best experience with Super B tools to our customers around the world, we have introduced a strict inspection system in every single one department from manufacturing to packaging, just would like to ensure every product we made is perfect, we believe it could help users to increase their trust with Super B.

Now, bike environment is an ever-changing industry, to overcome this situation, Super B will keep working hard to make more and more friendly products for all of you and write down the history belong to everyone who ever used Super B products around the world.

Unique  
Intelligent  
Ergonomic

TOOL  
EXCELLENCE



# CONTENTS

<b>01</b>	DISPLAY SYSTEM & APPAREL	<b>32</b>	PEDAL
<b>02</b>	WORK STATION	<b>33</b>	BOTTOM BRACKET
<b>05</b>	PROFESSIONAL BICYCLE TOOL SET	<b>35</b>	FREEWHEEL & CASSETTE & BOTTOM BRACKET
<b>08</b>	BICYCLE TOOL SET	<b>37</b>	BOTTOM BRACKET & E-BIKE LOCKRING TOOL
<b>09</b>	FRAME & FORK	<b>38</b>	STORAGE STAND
<b>15</b>	BRAKE & DISC BRAKE	<b>42</b>	WORK STAND
<b>17</b>	WHEEL TRUING	<b>45</b>	CLEANING TOOL
<b>19</b>	TORQUE WRENCH	<b>47</b>	TUBE & TIRE
<b>21</b>	CHAIN	<b>49</b>	HUB & AXLE
<b>24</b>	CHAIN & HOLDER & HOOK	<b>50</b>	CHAINWHEEL & HUB & AXLE
<b>25</b>	SPOKE	<b>51</b>	FOLDING TOOL
<b>27</b>	HEX & TORX® WRENCH	<b>55</b>	ESSENTIAL TOOL
<b>29</b>	FREEWHEEL & CASSETTE	<b>57</b>	DISTRIBUTOR
<b>31</b>	CRANK	<b>59</b>	INDEX

PROFESSIONAL

Super B “shop quality” tools are designed specifically for workshops, professional cycling mechanics or customers who want the best and most durable tools.

TOOL  
EXCELLENCE

## Super B Limited Lifetime Warranty

Under normal usage, if a Super B product defects in material or process issue, the tool will be repaired or replaced. This warranty does not cover consequential damage or cost of injury incurred by the user. If tools that are worn from normal usage or damaged caused by accident, abuse, neglect, modification, improper application or conjunction with other devices are NOT covered by the warranty.

# THE NEW DISPLAY AND SALE SYSTEM



**TB-PB08, TB-PB10**

- Designed for mechanics at bikeshop or service center to store tools with easy access.
- Tools are not included.
- Spec:

Item No	Pegboard	Width x Height (cm)
TB-PB08	8 pcs	200 x 80
TB-PB08H	8 pcs	200 x 80
TB-PB08-1	8 pcs	200 x 80
TB-PB08-1H	8 pcs	200 x 80
TB-PB10	10 pcs	250 x 80
TB-PB10H	10 pcs	250 x 80
TB-PB10-1	10 pcs	250 x 80
TB-PB10-1H	10 pcs	250 x 80

Item No	Screws	Hooks
TB-PB08	For wooden wall	0
TB-PB08H	For wooden wall	80 pcs
TB-PB08-1	For concrete wall	0
TB-PB08-1H	For concrete wall	80 pcs
TB-PB10	For wooden wall	0
TB-PB10H	For wooden wall	100 pcs
TB-PB10-1	For concrete wall	0
TB-PB10-1H	For concrete wall	100 pcs



*Make you a bike master!*



TB-PB40

## Pegboard display stand

- Great for display all types of tools for sale.
- Width: 50 cm, height: 188 cm.
- Tools and hooks are not included.



TB-PB30

## Pegboard display stand

- Great for display all types of tools for sale.
- Width: 100 cm, height: 188 cm.
- Tools and hooks are not included.



TB-1313

## Vintage ball cap

- Features Super B mascot image and classic logo in raised embroidery at front and back.



TB-1311

## Ball cap - Black

- It features Super B logo in raised embroidery at front.



TB-1331

## Super B T-shirt



TB-1334

## Super B sweatshirt



TB-1325

## Mechanic shirt

- Short sleeve.



TB-1310

## Heavy duty shop apron

- Protect your clothing from dirt or oil while doing maintenance task or repair on your bike by wearing the apron.



TB-HKS80, TB-HKS100

## Hooks for pegboard system

- Optional for TB-PB08 / TB-PB10 / TB-PB30 / TB-PB40.
- Spec:
- TB-HKS80: set of 80 pcs.
- TB-HKS100: set of 100 pcs.



TB-1320

## Super B banner

- H: 14.5 cm x L: 33 cm official Super B banner.
- The perfect way to decorate your shop and garage.
- Easy to hang on the wall and board.



TB-1316B

## Sport mask

- Designed with Super B classic logo.
- SGS Antibacterial Test (>99%)
- Waterproof



TB-1316A

## Sport mask

- Designed with Super B mascot.
- SGS Antibacterial Test (>99%)
- Waterproof

# WORK STATION

TBA9000



## Work station

- All-in-one service center is designed for bike shop, professional cycling team, show room or home workshop.
- A complete set of high quality and professional tools includes freewheel turner / freewheel remover, bottom bracket tool, pedal wrench, crank tools, tire levers, hub cone wrenches, Y wrenches, torque wrenches / bit sockets, chain rivet extractors, cable cutter, spoke wrenches, screwdrivers, cleaning tools, apron, frame & fork tools and everything you could think of is all in this work station.
- Three optional accessories: vise TB-1918, iron shelf TB-1919 and work stand TB-1971.

## Optional:

- A** 4" Steel vise TB-1918
- B** Iron shelf TB-1919
- C** Work stand TB-1971



TB-WC10

## Working chair

- Designed soft cushion makes mechanics to work efficiently and move around freely.
- Two convenient storage spaces for necessary tools and parts.
- Features ball wheel design is for moving around work places easier.
- Height: 310 mm.
- Tools are not included.



A TB-1918

## 4" Steel vise

- Equipped with durable long lasting jaw and anvil 360° swivel base, jaw opening: 4", throat depth: 2-1/4".



C TB-1971

## Work stand

- Clamp with quick release function.
- Fits tubes upto 2.5".

B TB-1919

## Iron shelf

- Available to mount the optional part of vise, TB-1918.

# All-in-one WORK STATION



## 3<sup>rd</sup> LAYER

### C1/C2

- C1:
  - 1-Professional pedal wrench 15 mm.
  - 1-Multi-function pedal wrench 15 mm with 14 / 15 mm box wrench.
  - 1-T-shaped wrench, 3-ended with T30 / hex 5 mm / T30.
  - 1-T-shaped chainring nut wrench, 3-ended with T40 / hex 6 mm / chainring nut wrench.
  - 1-2 in 1 cotterless crank tool, for standard square, splined Shimano® octalink and ISIS Drive®.
  - 3-Y wrench, size: hex 2 / 2.5 / 3 mm, hex 4 / 5 / 6 mm, T25 / T30 / T40.
  - 8-Hex key wrench w/ ball end, size: 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
- C2:
  - 7-Professional hub cone wrench, size: 13 / 14 / 15 / 16 / 17 / 18 / 19 mm.
  - 1-B.B. wrench for installation and removal of Campagnolo® (Veloce™, Mirage™, Centaur™, Daytona™ and Avanti™) cartridge bottom brackets.
  - 1-Rotor truing fork.

## 4<sup>th</sup> LAYER

### D1/D2

- D1:
  - 4-Frame tap, size: 3 mm x 0.5; 5 mm x 0.8; 6 mm x 1.0; 10 mm x 1.0
  - 4-Pedal tap, size: 1/2" x 20 (L & R), 9/16" x 20 (L & R).
  - 1-Inner cable puller.
  - 1-Professional cable & housing cutter.
  - 1-Chain rivet extractor for 1/8" to 3/16" BMX and single speed chain.
  - 1-Chain rivet extractor for 10 & 11 speed chain.
  - 1-Chain rivet extractor for 8, 9 & 10 speed chains, with 1 spare pin and 1 chain hook.
  - 1-2 in 1 chain checker and chain hook.
  - 1-Replacement pins set for Super B chain rivet extractors (10 pcs / kit).
- D2:
  - 4-Spoke wrench, size: 3.2 / 3.3 / 3.5 mm and for Mavic® 6 spines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple.
  - 2-Professional tire lever, made of high grade steel.
  - 1-Aero spoke key, size: 0.9 / 1.1 / 1.3 / 1.9 mm.
  - 1-Spoke wrench, size: for Shimano® wheel system 4.3 & 4.4 mm nipples.
  - 1-Spoke wrench, size: for Mavic® 9 mm threaded eyelets and 7 mm integrated nipples.
  - 4-Screwdriver, size: Phillips 0 / 2 and slotted 3 / 6.
  - 4-Nipple tool, size: hex 4.8 mm, hex 5.5 mm, square 3.2 mm and slotted end for conventional slit nipple.
  - 3-Tire lever.

## 5<sup>th</sup> LAYER

### E1/E2

- E1:
  - 1-Star nut setter for 1" & 1-1/8" threadless headsets.
  - 1-Dead blow hammer.
  - 1-Measure tap, 3 m / 10 ft.
  - 1-Spoke, bearing and crank cotter gauge.
  - 1-Oversized tube cutting guide.
  - 1-Crown race remover for 1", 1-1/8", 1-1/4", 1-1/2" forks.
  - 1-Brake piston press for speeding up pad replacement.
- E2:
  - 1-Bike folding brush.
  - 3-Bike brush.
  - 1-Chain cleaner.

## 6<sup>th</sup> LAYER

### F

- F:
  - 1-Wheel alignment gauge for 16" to 26" wheels.
  - 1-Hacksaw, with a steel blade 12"(300 mm).
  - 1-Hacksaw blade for cutting carbon components.
  - 1-1/4" Dr. dial-adjust torque wrench 3-15 Nm, with bit sockets: hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm, T25.
  - 1-6" Diagonal cutting nippers.
  - 1-7" Combination pliers.
  - 1-8" Long nose pliers.
  - 1-10" Waterpump box joint.

## 7<sup>th</sup> LAYER

### G

- G:
  - 1-3/8" Dr. dial-adjust torque wrench 12-60 Nm with bit sockets: hex 4 / 5 / 6 / 8 / 10 mm, T25 / T30 / T40, adaptor 3/8" Dr. x 1/2" Dr.
  - 1-Bearing cup press for most standard 1", 1-1/8", 1-1/4" and 1-1/2" headset cups.
  - 1-Head cup remover for 1", 1-1/8" and 1-1/4" press fit external cups.
  - 1-Heavy duty shop apron.



## 1<sup>st</sup> LAYER

### A1/A2

- A1:
  - 1-Freewheel remover with guide pin, for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
  - 1-Freewheel turner, for 5 to 10 speed cassettes.
  - 1-Locking wrench, for most lock-rings of bottom bracket.
  - 1-Bottom bracket wrench, for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN®, and similar external B.B. cups with 16 notches.
  - 1-Crank installation tool to remove and install crank arm adjustment cap.
  - 1-Bottom bracket tool & freewheel remover, for Campagnolo® B.B. cups and Campagnolo® cassette lockrings (Record™, Chorus™ and Athena™).
  - 1-Cardige B.B. tool with guide pin, for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- A2:
  - 8-T/L handle hex wrench, 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.

## 2<sup>nd</sup> LAYER

### B1/B2

- B1:
  - 1-12" adjustable wrench.
  - 1-Freewheel remover with guide pin, for Shimano®, SunRace®, SRAM®, Chris King®, SunTour®, and other cassette lockrings.
  - 1-Freewheel remover, for Shimano® MF freewheel.
  - 1-Freewheel remover, for 4-notch BMX & single-speed freewheels.
  - 1-Cardige B.B. tool, for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
  - 1-Cardige B.B. tool, for Shimano®, Truvativ®, SRAM® and all ISIS Drive® 8-notch B.B. cups.
  - 1-B.B. tool, for Shimano® Hollowtech II, Truvativ® & FSA® MegaExo & Campagnolo® Ultra-Torque, TOKEN® and many other external bearing crankset bottom brackets.
  - 1-1/2" Dr. bit socket 10 mm hex wrench for Campagnolo®.
  - 8-Combination wrench, size: 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 mm.
- B2:
  - 4-Headset wrench, size: 30 / 32 mm, 36 / 40 mm, 15 / 32 mm, 32 / 36 mm.
  - 1-Double-ended bottom bracket locking hook spanner.
  - 2-Double-ended wrench, size: 8 / 10 mm, 9 / 11 mm.




**TB-98750, TB-98755**

**Professional bicycle tool set**

• Designed for professional shop, bicycle cycling team and home mechanic who wants the best portable tool set.

• Includes the tools needed to perform almost basic repair or adjustment.

• Spec:

**TB-98750:** 53pcs, comes with the 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> layers.

**TB-98755:** 49pcs, comes with the 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> layers and leaves the first layer empty for spare parts.


**1<sup>st</sup> LAYER**

- 1-Head cup remover for 1", 1-1/8" and 1-1/4" press fit external cups.
- 1-Dead blow hammer.
- 1-Star nut setter for 1" & 1-1/8" threadless headsets.
- 1-Bearing cup press fits most conventional 1", 1-1/8", 1-1/4" and 1-1/2" headset cups.


**2<sup>nd</sup> LAYER**

- 6-25L bits with holder, size: Phillips 1 / 2, slotted 5 / 7 and T25 / T30.
- 1-Stubby wrench.
- 1-Freewheel turner and sprocket removal tool for 5 to 10 speed cassettes.
- 1-Bottom bracket wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-Cardridge B.B. tool with guide pin for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face® and Truvativ®.
- 1-Freewheel remover with guide pin for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-2 in 1 cotterless crank tool for standard square, splined Shimano® octalink and ISIS Drive® B.B. spindles.


**3<sup>rd</sup> LAYER**

- 1-Professional pedal wrench 15 mm.
- 1-Multi-function pedal wrench 15 mm with 14 / 15 mm box wrenches.
- 1-2 in 1 chain checker and chain hook.
- 1-Professional cable & housing cutter.
- 4-Spoke wrench, size: 3.2 / 3.3 / 3.5 mm and for Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple.
- 1-Aero spoke key, size: 0.9 / 1.1 / 1.3 / 1.9 mm.
- 1-Chain rivet extractor for 8, 9 & 10 speed chains, with 1 spare pin and 1 chain pin guider.


**4<sup>th</sup> LAYER**

- 1-Double-ended wrench, size: 8 / 10 mm.
- 1-T-shaped chainring nut wrench, size: T40 / hex 6 mm / chainring nut wrench.
- 1-Y wrench, size: T25 / T30 / T40.
- 4-Professional hub cone wrench, size: 13 / 14 / 15 / 17 mm.
- 3-Tire lever.
- 1-Measure tape, 3 m / 10 ft.
- 8-Hex key wrench, size: 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
- 1-1/4" Dr. dial-adjust torque wrench 3-15 Nm.
- 6-Bit socket: hex 2 / 2.5 / 3 / 4 / 5 / 6 mm.


**TB-98555**
**21 pcs bicycle tool set**

- 1-Freewheel turner for 5 to 10 speed cassettes.
- 1-Pedal wrench 15 mm.
- 1-Freewheel remover with guide pin for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-Spoke wrench for 3.2 mm (0.127") nipple (Black).
- 1-Spoke wrench for 3.3 mm (0.130") nipple (Green).
- 1-Spoke wrench for 3.5 mm (0.136") nipple (Red).
- 1-Spoke wrench for Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple (Yellow).
- 2-Screwdriver, size: Phillips 2 and slotted 6.
- 3-Tire lever.
- 9-T/L handle wrench, size: hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm and T25.
- 1-Carry box.

**TB-1170**
**24 in 1 multi bicycle tool set**

- 2-Tire lever.
- 3-Round glueless patch.
- 1-Metal tube scuffer.
- 3-Multi-spanner 8 mm box wrench / bottle opener / Mavic® spoke wrench
- 2-9 / 10 mm box wrench
- 5-Chain rivet extractor w/ spoke wrench 3.2 / 3.5 / 3.3 / 3.5 mm.
- 1-Link pin holder.
- 2-Hex key 5 / 6 mm.
- 2-Hex 4 mm and SL 4.
- 1-Hexy key 3 mm
- 2-T25 and PH2.


**TB-1180**
**26 in 1 mini tool box**

- 1-Hex wrench 3 mm.
- 2-Tire lever.
- 3-Round glueless patch.
- 1-Metal tube scuffer.
- 3-Multi spanner 8 mm box wrench, bottle opener, Mavic® spoke wrench.
- 2-9 / 10 mm box wrench.
- 7-Chain rivet extractor w/ spoke wrench for 3.2 / 3.5 mm and Mavic® 5.65 mm nipples, brake piston press, bottle opener and 10 mm box wrench.
- 2-Hex key 4 mm and slotted 4 screwdriver.
- 2-T25 and Phillips 2 screwdriver.
- 2-Hex key 5 / 6 mm.
- 1-Link pin holder.


**TB-98550**
**35 pcs bicycle tool set**

- Designed for riders and home mechanics, it is an ideal and durable tool set.
- The wonderful combination of tools to clean, adjust, maintain and other basic repair for your bikes.
- Includes the tools to perform many advanced repair operations, such as disassemble and install pedals, external bearing crank set bottom brackets, hubs, cassette lockrings, adjust spoke, cut cables or housing, clean frame tubes, tires, wheels, chains and so on.

• Contents:

- 1-Chain rivet extractor, for 3/32" to 3/16" chain and 8, 9 & 10 speed chains.
- 1-Bike folding brush.
- 1-Chain cleaner is to clean all speed chains without removing it.
- 1-Aero spoke key, for 0.9 / 1.1 / 1.3 / 1.9 mm.
- 1-T-shaped wrench, 3-ended with T30 / hex 5 mm / T30.
- 1-T-shaped chainring nut wrench, 3-ended with T40 / hex 6 mm / chainring nut wrench.
- 1-Measure tap, 3 m / 10 ft.
- 1-2 in 1 cotterless crank tool, for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- 1-Cardridge B.B. tool, for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, RaceFace® and Truvativ® & TOKEN®.
- 1-Freewheel remover with guide pin, for Shimano®, SunRace®, SRAM®, Chris King®, SunTour®, other cassette lockrings and some Shimano® disc brake system lockrings.
- 1-B.B. wrench, for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque, TOKEN® and many other external bearing crank set bottom brackets and crank installation tool to remove and install crank arm cap.
- 1-Freewheel turner, for 5-10 speed cassettes.
- 1-Pedal wrench 15 mm.
- 3-Tire lever.
- 1-2 in 1 master link pliers-The Trident, to install and remove master links by single hand.
- 1-Professional cable & housing cutter.
- 2-Hub cone spanner, 13 x 14 x 15 x 16 mm.
- 4-Spoke wrench, size: 3.2 / 3.3 / 3.5 mm and for Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple.
- 9-T/L handle wrench, size: hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm, T25.
- 2-Screwdriver, Phillips 2, slotted 6.
- 1-Carry box.


**TB-96710**
**Essential tool kit**

- 1-Mini pump.
- 1-Saddle bag.
- 3-Tire lever.
- 1-Patch repair kit (self-adhesive patch x 6 and sandpaper x 1).
- 1-16 in 1 folding tool. (2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench, T25 / T30, Phillips 1 screwdriver, chain rivet extractor with spoke wrenches 3.2 / 3.5 / 3.3 / 3.5 mm and link pin holder).

Super B provides various tool boxes for team mechanics. Includes the Premium series tools of the most frequently used tools in high quality blow case for storage and transportation.



**NEW**

**TBA5000**



### 34 pcs bicycle tool set

- 2-Professional tire lever.
- 1-Professional pedal wrench 15 mm.
- 1-Professional cable & housing cutter.
- 1-2 in 1 chain checker and chain hook.
- 1-Adaptor for Shimano® SM-BBR60.
- 1-Adaptor for Shimano® SM-BB9000, SM-BB93 & TOKEN®.
- 9-Hex key wrench, size: 1.5 / 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
- 9-Torx® key wrench, size: T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-Spoke wrench, size: 3.2 mm (0.127"), 3.3 mm (0.130"), 3.5 mm (0.136").
- 1-Chain whip pliers, with cogs from 10-17 teeth, compatible for 5 to 11 speed.
- 1-Universal chain rivet extractor for 3/32" to 3/16" and 5 to 12 speed chains.
- 1-Bottom bracket wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-2 in 1 cotterless crank tool for standard square, splined Shimano® octalink and ISIS Drive® B.B. spindles.
- 1-Freewheel remover with guide pin for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-Bracket B.B. tool with guide pin for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face® Truvativ® and TOKEN®.
- 1-Blow case.



**TBA3000**



### 30 pcs bicycle tool set

- 3-Steel core tire lever.
- 1-Y wrench, size: hex 4 / 5 / 6 mm.
- 1-Y wrench, size: T25 / T30 / T40.
- 1-Professional pedal wrench 15 mm.
- 4-Professional hub cone wrench, size: 13 / 14 / 15 / 17 mm.
- 1-2 in 1 chain checker and chain hook.
- 1-Double-ended wrench, size: 8 / 10 mm.
- 1-Bracket B.B. tool with guide pin for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- 9-Hex key wrench, size: 1.5 / 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
- 1-B-shaped spoke wrench, size: 3.2 / 3.3 / 3.5 / 4.0 mm.
- 1-Bottom bracket wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-Freewheel remover with guide pin for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-2 in 1 cotterless crank tool for standard square, splined Shimano® octalink and ISIS Drive®.
- 1-Chain rivet extractor for 8, 9 & 10 speed chains, with 1 spare pin and 1 chain hook.
- 1-Freewheel turner and sprocket removal tool for 5 to 10 speed cassettes.
- 1-Blow case.

**TBA2000**



### 36 pcs bicycle tool set

- 1-L handle.
- 3-Steel core tire lever.
- 1-1/4" Dr. to hex socket adaptor.
- 3-1/4" Dr. socket, size: hex 8 / 9 / 10 mm.
- 1-8 mm hex key wrench with 1/2" Dr. adaptor.
- 1-Headset wrench, size: 32 / 36 mm.
- 1-Double-ended wrench, size: 8 / 10 mm.
- 6-Hex key wrench, size: 2 / 2.5 / 3 / 4 / 5 / 6 mm.
- 2-Hub cone wrench, size: 13 / 14 / 15 / 17 mm.
- 1-Chainring nut wrench.
- 1-B-shaped spoke wrench, size: 3.2 / 3.3 / 3.5 / 4.0 mm.
- 1-2 in 1 cotterless crank tool for standard square, splined Shimano® octalink and ISIS Drive®.
- 1-Chain rivet extractor for 8, 9 & 10 speed chains, with 1 spare pin and 1 chain hook.
- 1-Freewheel turner for 5 to 10 speed cassettes.
- 1-Bracket B.B. tool for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- 1-Bottom bracket wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-Multi-function pedal wrench 15 mm with 14 / 15 mm box wrenches.
- 6-25L bits with holder, size: Phillips 1 / 2, slotted 5 / 7 and T25 / T30.
- 1-Freewheel remover for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-Blow case.



Classic bicycle tools sets designed for riders and home mechanics to maintain and do some basic repairs. Offer you the great performance.



**TBA800**

### 29 pcs bicycle tool set

- 1-Chain rivet extractor for 8, 9 & 10 speed chains and 3 / 32" to 3 / 16" chain.
- 1-Screwdriver, size: Phillips 2.
- 1-Y wrench, size: T25 / T30 / T40.
- 1-Cable cutter.
- 4-Hub cone wrench, size: 13 / 14 / 15 / 17 mm.
- 8-Hex key wrench, size: 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
- 1-Pedal wrench 15 mm.
- 1-Freewheel turner for 5 to 10 speed cassettes.
- 1-Bracket B.B. tool with guide pin for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- 1-Chainring nut wrench.
- 1-Freewheel remover with guide pin for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-2 in 1 cotterless crank tool for standard square, splined Shimano® octalink and ISIS Drive®.
- 1-B.B. wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-O-shaped spoke wrench, size: 9 G-15 G.
- 3-Tire lever.
- 1-Patch repair kit.
- 1-Blow case.

Economical



**TBA500**

### 27 pcs bicycle tool set

- 1-Pedal wrench 15 mm.
- 2-Screwdriver, size: Phillips 2 and slotted 6.
- 1-8 mm hex key & 1/2" Dr. adaptor.
- 3-Tire lever.
- 1-2 in 1 cotterless crank tool for standard square type crank & Shimano® splined octalink and ISIS Drive®, with 14 mm box wrench.
- 6-Hex key wrench, size: 2 / 2.5 / 3 / 4 / 5 / 6 mm.
- 1-Chain rivet extractor, for 8, 9 & 10 speed chains and 3 / 32" to 3 / 16" chain.
- 1-Double-ended wrench, size: 8 / 10 mm.
- 1-Freewheel remover for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and similar cassette lockrings.
- 1-Freewheel turner for 1/8" fixed gear sprocket.
- 2-Hub cone spanner, size: 13 / 14 / 15 / 16 mm.
- 1-Crank installation tool to remove and install crank arm adjustment cap.
- 1-B.B. wrench for Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and similar external B.B. cups with 16 notches.
- 1-O-shaped spoke wrench, size: 9 G-15 G.
- 1-Bracket B.B. tool for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- 1-Patch repair kit.
- 1-Double-ended Torx® key, T25.
- 1-Blow case.

Economical



**TBA300**

### 21 pcs bicycle tool set

- 1-Freewheel turner for 1/8" fixed gear sprockets.
- 1-2 in 1 cotterless crank tool for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- 1-Multi-function pedal wrench, 15 mm pedal wrench with 8 / 10 mm hex wrench.
- 1-Freewheel remover for Shimano® HG cassettes, SunRace®, SRAM®, ChrisKing® and other cassettes lockrings.
- 1-Chain rivet extractor, for 3/32" to 3/16" chains and 8, 9 & 10 speed chains.
- 1-B.B. wrench, for Shimano® Hollowtech II, Truvativ GXP®, FSA® MegaExo, Campagnolo® Ultra-Torque™, TOKEN® and other external bottom brackets.
- 1-Crank installation tool.
- 6-Hex key, size: 2 / 2.5 / 3 / 4 / 5 / 6 mm, with a holder to use with hex key as being a handle.
- 1-Patch repair kit, self-adhesive patch x 6, sandpaper x 1.
- 1-Spoke wrench, 3.2 / 3.3 / 3.5 mm.
- 1-Adaptor 8 mm hex x 1/2" Dr.
- 1-Double-ended Torx® key, T25.
- 3-Tire lever.
- 1-Blow case.

**TB-1935 PAT.****Bearing cup press**

- It's for precise cup adjustment and tight press to fit most conventional 1", 1-1/8", 1-1/4" and 1-1/2" headset cups.
- Presses cartridge bearings and cups into one-piece bottom.
- Features a quick release design for users to operate easily.

**TB-935F****Bearing cup press extender**

- Designed for mini-wheel bike, especially for longer head tube.
- Optional part for TB-1935, available extension 350 mm, can support head tube of maximum 600 mm.

**TB-935B, TB-935D****Bearing cup press adaptor**

- Optional for bearing cup press, TB-1935, to install 1-1/8" ZS and 1-1/2" ZS headset to avoid damage lightweight headset.
- Can also use on bearing preset headset on another side.
- Spec:

TB-935B: for 1-1/8" ZS headset, 2 pcs / set.  
TB-935D: for 1-1/2" ZS headset, 2 pcs / set.

**TB-1938, TB-1939****Crown race setting system**

- The heavy duty driver tube and specially-sized aluminum setting rings can safely, quickly and precisely install crown races.
  - Spec:
- TB-1938: includes 6 rings for most 1" and 1-1/8" headset systems.  
TB-1939: includes 2 rings for 1.5" and 1-1/4" headset systems.

**TB-1131****Star nut setter**

- Quickly and easily to install star-fangled nuts.
- Sets the star-fangled nut to 15 mm and keeps it straight.
- Fits 1-1/2" threadless headset.

**TB-1130 PAT.****Star nut setter**

- Quickly and easily installs star-fangled nuts.
- Designed handle prevents fingers pinched.
- Star nut is not included.
- Fits 1" and 1-1/8" threadless headsets.

**TB-1945****Fork threading set**

- Professional design for cutting new threads and chasing existing threads on fork thread set including fork columns that are not chromed.
  - The expandable cutting dies are made from highest quality speed steel (HSS) for accurate cutting.
  - Specially designed to allow the metal chips and shavings that produced during use to fall completely through the guide, preventing damage to the fork threads and the tool.
  - Spec:
- TB-1945: Include full set of 1", 1-1/8", 1-1/4" cutting dies, cutting guides, and die handles.  
TB-1945-1: 1" x 24TPI cutting die, cutting guides, and die handles.  
TB-1945-2: 1-1/8" x 26TPI cutting die, cutting guides, and die handles.  
TB-1945-3: 1-1/4" x 26TPI cutting die, cutting guides, and die handles.  
TB-1945-4: 1-1/8" x 26TPI, 1" x 24TPI cutting die, cutting guides, and die handles.
- Optional cutting die and guides:
- TB-945A: 1" x 24TPI cutting die.  
TB-945B: 1-1/8" x 26TPI cutting die.  
TB-945C: 1-1/4" x 26TPI cutting die.  
TB-945D: 1" cutting guide.  
TB-945E: 1-1/8" cutting guide.  
TB-945F: 1-1/4" cutting guide.

**TB-1917****Tubing cutter**

- The blade is made of highest speed steel (HSS) to have a clean and straight cut on the steel and aluminum tube.
- Fits 6-38 mm tube (1/4"-1-1/2").
- Includes a tube deburring tool and a spare blade.

**TB-1161, TB-1161-1****Hacksaw**

- Blade tension adjustable and comfortable handle make it an ideal hacksaw for you.
- TB-1161: Includes one steel blade 12"(300 mm) to cut metal components.  
TB-1161-1: Attached 2 blades, one steel blade 12"(300 mm) to cut metal components and one tungsten steel blade (TB-1161A) to cut carbon components.

**TB-1948****Crown race cutting tool**

- Heavy duty and high quality machining tool is for milling both the outer edge and lower surfaces of the crown race seat, ensuring a smooth, accurate cut and proper alignment of the fork in the frame.
  - Includes 4 cutters and 2 guides for:
- 26.5 mm and 27.1 mm crown race seats on 1" forks.  
30.1 mm crown race seats on 1-1/8" fork.  
39.8 mm crown race seats on the tapered fork with upper 1-1/8" and lower 1-1/2".
- With 1" and 1-1/8" guides.

**TB-1169****Oversized tube cutting guide**

- Perfectly guides a hacksaw to cut airfoil shaped seat posts up to 75 mm or round tubes from 1" to 1-3/8" in diameter.

**TB-1169A****Cutting guide plate**

- Spare parts for TB-1169.
- Set of 2 pcs.

**TB-1161A****Hacksaw blade for carbon components**

- Tungsten steel blade is specially designed to smoothly cut carbon composite handlebars, forks, seat masts, seat posts, etc.
- It's similar to grinder or grinding stone, but it's more efficient.
- For carbon composite only, not for cutting alloy.
- Spare parts for hacksaw, TB-1161 and TB-1161-1.

**Head cup remover**

Made from high grade, heat treated steel for shop daily use. The tool makes your job of headset cup removal easily.

**NEW**

TB-1929A

**Head cup and B.B. removal tool**

- Accept most 24 mm - 30 mm internal diameter press fit bottom bracket bearings.
- Fits 7/8" external head cups of balance bike.



TB-1936, TB-1937, TB-1941

**Head cup remover**

- Spec:
- TB-1936: for 1", 1-1/8" and 1-1/4" press fit external cup.
- TB-1937: for 1", 1-1/8" press fit internal cup and 1-1/2" press fit external cup.
- TB-1941: for 1-1/4" and 1-1/2" press fit internal cup.



TB-HS30~TB-HS40

**Headset wrench**

- The headset wrench is made of Cr-Mo steel with laser cutting and heat treatment for long life.
- Specifically designed cone end to work on the headset.

- Spec:
- TB-HS30: 30 x 32 mm    TB-HS32: 32 x 15 mm.
- TB-HS36: 32 x 36 mm    TB-HS40: 36 x 40 mm.



TB-1926

**Universal crown race puller**

- A precision tool for quickly and easily removing the headset crown race from the crown race seat of the fork.
- Universal design works with 1", 1-1/8", 1-1/4" and 1-1/2" crown race / fork (suspension, rigid) combinations, especially for carbon fiber, and aluminum racing forks.
- Built with heavy duty structure for shop daily use.



TB-1926A

**Universal crown race puller blade**

- Replacement parts for universal crown race puller TB-1926.
- Packed in 2 pcs / set.



TB-1925

**Crown race remover**

- Features an easy to use, universal design that will work on both ridged and suspension forks with crown races.
- Updated with the replaceable blades design.
- Blades are necessarily thin and will wear with use.
- For 1", 1-1/8", 1-1/4" and 1-1/2" fork to remove the headset crown race from the fork.



TB-1946

**Derailleur hanger alignment gauge**

- Designed to measure and straighten misaligned derailleur hangers.
- Simple and accurate to check the alignment of rear derailleur hanger and solve most derailleur shifting problems, especially those with index shifting systems.
- Updated to work on more frames, includes thru axle frames.
- Fits to most wheels, 20"-29".



TB-ET06

**Rear derailleur hanger extension**

- The device extends the position of road derailleur to run a wide-range mountain bike style cassette.



Widening: 50 - 155 mm.



Narrowing: 20 - 130 mm.



TB-1944

**Frame and fork adjustment tool**

- Expanding & compressing steel forks, chain stays, and seat stays.
- Designed threads provide great leverage.
- Adjusting bars opening:
- Inside distance 20-130 / outside distance 50 - 155 mm.
- Note: not available for carbon, aluminum alloy or suspension frames and forks.

TB-1942

**Frame alignment gauge**

- Check the alignment of frame quickly and accurately at the dropout.
- Put the tool on dropout and compare the indicator distance with the dropout on the opposite side.
- If both dropouts have the same distance to retractable pointer, the frame is aligned.
- Retractable pointer fits most common sizes and types of bicycles.



TB-1947

**Seatpost sizing gauge**

- Accurate gauge for quick checking the diameter of seat tube.
- Size range from 25 mm to 31.8 mm.
- Lasering etched readings last for longevity.



After crash



After installing TB-ET05

TB-ET05

**Emergency hanger**

- Intelligent design for getting you back home.
- Designed to temporarily replace a hanger that is damaged or broken on a ride.
- Mounts to most dropouts.
- Work with most frames, derailleurs with 5 mm QR and 9 mm / 10 mm thread axle.
- Included nut for quick release screw.



TB-1943

**Frame & fork end alignment gauge set**

- Determines whether dropouts are aligned and parallel to avoid bent axles or skewers, tracking and index shifting problems.
- Long handles and comfortable grips provide you superior leverage for straightening.



**TB-HT10, TB-HT11** 

**Head tube reaming & facing set**

- Combines reaming and facing of the head tube to produce a great fit for most sizes of head cups.
- A reamer is for cleaning or increasing the diameter of the head tube.
- All cutting facers and reamers are made of high speed steel for hardness.

**Spec:**  
**TB-HT10:**  
 Reamer: 30.05 mm, 33.9 mm and extender.  
 Facer: 64 mm.  
 Guide: 36.8 mm, 33.7 mm and 29.8 mm.

**TB-HT11:**  
 Reamer: 43.95 mm, 55.95 mm and extender.  
 Facer: 64 mm.  
 Guide: 43.8 mm and 55.8 mm.



Headset Standard	Headset Cup Dimension	Head Tube Dimensions	Required for Reaming and Facing	Required for Facing Only
1" Traditional-JIS	30.00~30.10 mm O.D.	29.85~29.90 mm I.D.	N/A	
1" Traditional-Professional	30.20~30.30 mm O.D.	30.05~30.10 mm I.D.	655	663
1-1/8" Traditional	34.05~34.15 mm O.D.	33.90~33.95 mm I.D.	656	665
1-1/4" Traditional	37.05~37.15 mm O.D.	36.90~36.95 mm I.D.	N/A	666
1-1/2" Traditional	49.70~49.75 mm O.D.	49.57~49.61 mm I.D.	552, 657	552, 667
1-1/8" Semi-Integrated	44.05~44.10 mm O.D.	43.95~44.00 mm I.D.	552, 658	552, 668
1-1/2" Semi-Integrated	55.99~56.04 mm O.D.	55.90~55.95 mm I.D.	552, 659	552, 669
1-1/8" Integrated-IS Top	no cup	41.10~41.2 mm I.D., 3.10~3.20 mm Depth, 45 Angle	6605	N/A
1-1/8" Integrated-IS Bottom	no cup	41.10~41.2 mm I.D., 6.90~7.0 mm Depth, 45 Angle		
1-1/8" Integrated-Italian Top	no cup	41.95~42.05 mm I.D., 2.8~3.0 mm Depth, 45 Angle	6625	N/A
1-1/8" Integrated-Italian Bottom	no cup	41.95~42.05 mm I.D., 6.60~6.80 mm Depth, 45 Angle		
1-1/2" Integrated-Bottom	no cup	52.05~52.15 mm I.D., 7.30~7.50 mm Depth, 45 Angle	6650	N/A

**TB-98150, TB-98150-1** 

**Bottom bracket tapping & facing set**

- A professional tool for tapping the threads in the bottom bracket shell of a frame as it's internal thread is not acceptable.
- All cutters are made of high speed steel for durability.
- Guides to keep the included facing cutter perfectly square with the axis of the bottom bracket for cleanup of the faces of the bottom bracket shell.
- Included a brush to help you to clean up iron filing after tapping, facing in the bottom bracket shell of a frame and iron filing on the taps and the cutters.

**Spec:**  
**TB-98150 (for English tap):**  
 1.370" x 24 TPI right hand thread.  
 1.370" x 24 TPI left hand thread.  
**TB-98150-1 (for Italian tap):**  
 36 mm x 24 TPI right hand thread.



**TB-19000** 

**Tap set with a tap handle**

- Designed to be a complete set, combining top quality precision frame taps and pedal taps with a tap handle.
- Size:  
 1/2" x 20 left & right ; 9/16" x 20 left & right  
 4 mm x 0.5 ; 5 mm x 0.8 ; 6 mm x 1.0 ; 8 mm x 1.0 ; 10 mm x 1.0

**TB-1901, TB-1902, TB-1903, TB-1904** 

**Frame tap**

- Made of high grade steel and are precision ground.
- The frame taps cut easily and fit conventional tap handles.

**Spec:**  
**TB-1901:** 3 mm x 0.5, for rear wheel drop-out alignment screws.  
**TB-1902:** 5 mm x 0.8, for water bottle, toe clip, fender and rack bosses.  
**TB-1903:** 6 mm x 1.0, for cantilever brakes and large fender bosses.  
**TB-1904:** 10 mm x 1.0, for derailleur hanger.



**TB-HD05** 

**Stem alignment tool**

- Precisely aligns handlebar to the front wheel with laser beam.
- Press-and-check helps mechanics and professional riders to tell if the stem needs proper alignment immediately.
- The recesses and Velcro secure the tool mounted on both stem and handlebar until the stem has been aligned.




**TB-1905, TB-1906** 

**Pedal tap**

- These are made of high carbon steel and are precise ground.
- The pedal taps cut easily and fit conventional tap handles.
- Clean out or restore damaged threads in crank arms.
- Suitable for alloy or steel crank.

**TB-1905-L:** For 1/2" x 20 left pedal. **TB-1905-R:** For 1/2" x 20 right pedal.  
**TB-1906-L:** For 9/16" x 20 left pedal. **TB-1906-R:** For 9/16" x 20 right pedal.

**TB-RC10****NEW****Rotor checker**

- Check the worn rotor easily against minimum thickness for replacement.
- Tektro® e-bike (TH2.3 mm) : Min.TH2.0 mm.
- Magura® : Min TH1.8 mm.
- SRAM® : Min.TH1.55 mm.
- Shimano® / Hope® (Ø180-205 mm) : Min.TH1.5 mm.

**TB-BR10****Brake caliper alignment tool**

- Designed to set the proper pad gap and align with hydraulic and mechanical brake caliper.
- Accurate to align the brake caliper on disc brake system.

**TB-BR20****Brake shoe tuner**

- The ingenious tool with handy and practical design optimizes the job to tune the brake shoes.
- Works on the rim width 14 mm ~ 24 mm and the rim depth upto 50 mm.

**TB-MW40****Premium****Rotor truing fork**

- Features with two different slot depths.
- Made by laser cut from heat-treated and high quality steel for hardness.
- Dual density molded handle is particularly contoured for comfort.
- Gently adjust bent or damaged brake rotors.

**NEW****TB-DB10****Premium****Disc brake mount facing set**

- Faces any IS Mount, Post Most, or new Shimano® Flat Mount, including low clearance chainstay mounts.
  - Telescoping axle adaptors allow use with any configuration of open or thru-axle dropouts and dropout widths (including Boost 110, Boost 148 and all fat bike axles).
- Note: not available for steel frame and fork.

**TB-1940****Premium****Disc brake mount facing tool**

- To ensure disc brakes performance, the frame's mounting tabs must be aligned with the brake pads and rotor.
- Made of high-grade steel to perfectly face frame and fork disc brake mounts by removing paint and material to create a clean and flat surface.
- Compatible with International Standard (IS) and Postmount (PM).

**TB-1940A****Adaptor bushings**

- Optional for TB-1940 disc brake mount facing tool.
- Works with 12 mm or 15 mm thru axle.

**TB-8075****UPDATED****Hydraulic brake piston press**

- Designed to compress pistons by pushing the brake pads apart to speed-up service and pad replacement.
- Specially shaped to prevent damages to the pads when compressing.
- Soft handle provides good leverage, comfort and control.

**TB-IR20****Internal cable routing tool**

- Guides to install internal cables, wires and house inside the frame.
- Includes a long cable guider with attached magnet.
- Innovation design to keep adaptors nest neatly inside tool body.
- Adaptors: for inner cables, hydraulic hose, Di2 E-tube cable connector.

**TB-WR10, TB-WR11****Double-ended wrench**

- The compact wrenches are designed for professional users, home and traveling mechanics.
- Made of heat-treated and high grade steel Cr-Mo for hardness and durability.
- Specifically designed cone end for easy access to the narrowest area for quick repair.
- Suitable for brakes, shift., etc.
- Spec:  
TB-WR10: 8 x 10 mm.  
TB-WR11: 9 x 11 mm.

**TB-HC20****Hydraulic hose cutter**

- Precisely to cut non-metallic hydraulic brake hoses.
- Suits for professional mechanic and home mechanic to get a neat hydraulic hose as more important.
- Includes a spare blade.



Cable and housing end crimper.



Cuts housing.



Cuts cable.



Housing Reformer for easy installation of ferrules.

**TB-WC30 PAT.****Premium****Professional cable & housing cutter**

- Made of heat-treated SK5 industrial steel for hardness and durability.
- The cutting jaws is sharp and strong for a clean cut on bicycle cables, housing and spokes.
- Built in crimper for cable end caps and housing ferrules.
- Super B patented housing reformer to form hole for reforming housing ends, and easy installation of ferrules.
- Dual density molded handles are particularly contoured for leverage, comfort and control.
- Two sizes of cable end crimper integrated into handles.

**TB-4574 PAT.****Cable cutter**

- An economical cable cutter, designed for riders and home mechanics.
- Made of heat-treated high grade steel for hardness and durability.
- The cutting jaws are sharp and strong for a clean cut on bicycle cables and housing.
- It has a built in forming tool for reforming housing ends, and housing ferrules crimper for cable end caps, housing end cap.

**TB-4585****Inner cable puller**

- Pull cables tight while adjusting brakes or index shifting.
- Features one-hand operation with a thumb lock to hold the cable tight.
- An ideal tool for professionals, workshops and home mechanics.





TB-PF25 PAT.

#### Home mechanic wheel truing stand

- Portable design: Essential for small, mobile workshop and home mechanics.
- Simple and lightweight structure: Specifically for compact storage, transportation, quick and easy set up, repairing buckled wheels and building new ones. Simply open the frame, fold out the gauges and mount your wheel.
- Flippable holders and adjustable precision truing caliper allow working on not only front but also rear wheel for accurately truing.
- Fits 100 mm, 130 mm and 135 mm wheel hub width.
- Accepts the wheels between 16" - 29" with 9 mm axle hub.



TB-1930

#### Wheel alignment gauge

- Designed to check if rim is centered between the locknuts of the hub, or "dished".
- Easy to check the dish on most common road, mountain or BMX wheels from 20" to 29".
- Recommend to use with Super B truing stand for perfect alignment.

TB-PF30

#### Professional wheel truing stand (w/ dial indicator)

- Updated to accept hub width up to 175 mm and accept max wheel hub width to 210 mm if use with upright extension TB-PF26.
- Designed with dial indicator to provide more accurate operation for daily shop use.
- Measures wheels from 20" thru 29".
- Features:
  1. The measurement of dial indicator reads to 0.01 mm and provides users with higher accuracy for rear or front wheel truing.
  2. All-purpose arms with dial indicators make users easy to measure and true wheels in any angles and positions.
  3. Assemble all-purpose arms and dial indicator onto left upright allows user to measure and true disc brake.
  4. Extra-long uprights to accommodate wheels up to 29", no need to use extra upright extensions.
  5. Includes thru axle adaptors to accept the wheels with thru axle hubs between 10 mm - 20 mm.
  6. Can be mounted on bench.
  7. Measuring ruler is included.
- NOTE: 1. Turn the knob to loosen the arm before using every time.  
2. Calibrate the updated stand with centering gauge TB-PF33 if necessary.



TB-PF21

#### Dial indicator

- The dial indicator is installed on all purpose arms, reads to 0.01 mm and provides you more accuracy on rear and front wheels measurement when truing the wheel.
- Spare part for TB-PF30 and TB-PF36.

TB-PF22

#### Dial indicator & all-purpose arm

- All-purpose arms with dial indicators allow users to measure and true wheels in any angles and positions.
- For more accurate wheel and rotor truing.
- Spare part for TB-PF30 and TB-PF36, also optional for TB-PF35 to upgrade.
- Set of 2 pcs.
- NOTE: Turn the knob to loosen the arm(s) before using everytime.

TB-PF36

#### Professional mechanic wheel truing stand (w/ dial indicator)

- Updated to accept hub width up to 175 mm and accept max wheel hub width to 210 mm if use with upright extension TB-PF26.
- Designed with dial indicator to provide more accurate operation for daily shop use.
- Measures wheels from 20" thru 29".
- Features:
  1. The measurement of dial indicator reads to 0.01 mm and provides users with higher accuracy for rear or front wheel truing.
  2. All-purpose arms with dial indicators make users easy to measure and true wheels in any angles and positions.
  3. Assemble all-purpose arms and dial indicator onto left upright allows user to measure and true disc brake.
  4. Extra-long uprights to accommodate wheels up to 29", no need to use extra upright extensions.
  5. Includes thru axle adaptors to accept the wheels with thru axle hubs between 10 mm - 20 mm.
  6. Can be mounted on bench.
- NOTE: 1. Turn the knob to loosen the arm before using every time.  
2. Calibrate the updated stand with centering gauge TB-PF33 if necessary.



TB-PF26

#### Upright extension

- To accept wheel hub up to 210 mm in width. (tandem, fat and down hill Bikes)
- Optional parts for Super B® wheel truing stands, TB-PF30, TB-PF35 and TB-PF36.

TB-PF35

#### Professional mechanic wheel truing stand

- Updated to accept more types of wheelset with hub width up to 175 mm and accept max wheel hub width to 210 mm if use with upright extension TB-PF26.
- Provides accurate measurement to check for accurate truing.
- Measures wheels from 20" thru 29".
- Features:
  1. Extra-long uprights to accommodate wheels up to 29", no need to use extra upright extensions.
  2. Includes thru axle adaptors to accept the wheels with thru axle hubs between 10 mm - 20 mm.
  3. Can be mounted on bench.
- NOTE: Calibrate the updated stand with centering gauge TB-PF33 if necessary.



TB-PF32, TB-PF33

#### Wheel truing stand centering gauge

- Designed to check if the caliper is centered between the uprights and if two upright forks are parallel.
- High precision laser cut for accurate correction.
- Available for TB-PF30, TB-PF35 and TB-PF36.
- Spec:
  - TB-PF32: Gauge is updated for Super B wheel truing stands, which accept wheel hub width to 150 mm.
  - TB-PF33: New gauge is for upgraded Super B wheel truing stands, which accept wheel hub width upto 175 mm.

Torque wrench is a must tool for professional mechanics, home mechanics and riders. By using a high quality torque wrench, you would precisely apply a specific torque to a fastener such as a nut or bolt.

Features as below:

- Prevents the frame or component damaged, caused by over tightening.
- A must tool for carbon or high grade alloy components.



**TB-TW51 PAT.** **NEW**

Thumb adjustable torque wrench - 4 / 5 / 6 Nm

- Torque adjustable by single hand and no need extra tools support.
- Feature with ergonomic L-shaped handle for grabbing.
- Includes bits, size: Hex 3 / 4 / 5 / 6 mm, T25.



**TB-TW50 PAT.**

Adjustable torque wrench - 4 / 5 / 6 Nm

- Includes bits, size: Hex 3 / 4 / 5 mm and T25.



**TB-TW35-4, TB-TW35-5, TB-TW35-6, TB-TW35-7**

Preset torque wrench

- Ergonomic design and fine teeth mechanism provides accurate application of force.
- Specially design to reach hard-to-tight place.
- Includes bits, size: Hex 3 / 4 / 5 mm, T25.

•Spec:

- TB-TW35-4: 4 Nm.
- TB-TW35-5: 5 Nm.
- TB-TW35-6: 6 Nm.
- TB-TW35-7: 7 Nm.



**TB-TW25 PAT.P** **NEW**

1/4" Dr. dial-adjust torque wrench 2~15 Nm

- Specific design for bike torque range from 2~15 Nm.
- Intuitive and unique head indicates users when the applying torque is reaching the preset value and have benefit of error approving.
- Available torque wrench with dial for easy setup.
- Includes bit sockets: hex 3 / 4 / 5 / 6 / 8 / 10 mm, T20 / T25 / T30.
- One additional extension hex 5 mm for hard reaching screws.
- Carried with a blow case for protection.

Economical



**TB-TW16 PAT.** **NEW**

Preset torque key

- Economical option for anyone seeks for bigger torque referring to tighten bolts.
- Torque range :10 / 12 / 14 / 16 / 18 / 20 Nm.
- Includes bits, size: Hex 4 / 5 / 6 / 8 mm, T25 / Phillips 2.



**TB-TW20**

1/4" Dr. dial-adjust torque wrench 3~15 Nm

- Adjustable torque wrench with dial for easy setup.
- Available for both direction in clockwise and counter-clockwise.
- Includes bit sockets: Hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm, T25.
- Carried with a blow case for protection.



**TB-TW30**

3/8" Dr. dial-adjust torque wrench 12~60 Nm

- Adjustable torque wrench with dial for easy setup.
- Available for both direction in clockwise and counter-clockwise.
- Heavy duty and long design is made for leverage to fasten in high torque
- Includes bit sockets: hex 4 / 5 / 6 / 8 / 10 mm, T25 / T30 / T40, adaptor 3/8" Dr. x 1/2" Dr.
- Carried with a blow case for protection.



**TB-TW15 PAT.**

Economical torque key

- Affordable option for anyone seeks for torque referring to tighten bolts.
- Torque range: 3 ~ 10 Nm.
- Includes bits, size: Hex 3 / 4 / 5 / 6 mm, T25 / Phillips 2.



**TB-TW65** **Premium**

Digital torque wrench 3~30 Nm

- 1/4" Dr. torque wrench.
- Bit socket: Hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm, T25.
- Audio notification when reaching preset torque.
- Display modes include peak to display the max torque applied and trace to show the torque applied.
- LED backlit screen help you read the values even in the dark garage.
- Memory slots record 10 preset torque value.
- Auto turn off the display in 150 seconds.
- Carried with a blow case for protection.



**TB-TW55**

Mini ratchet torque kit - 4 / 5 / 6 Nm

- Innovation designed torque bits to apply in both direction, clockwise and counterclockwise.
- Preventing overtighting when the torque bits reaches it's preset value.
- Features with a fine tooth ratchet mechanism with reverse lever to use in ease.
- Includes 4 / 5 / 6 Nm preset torque bits and the 6 most popular tool bits, hex 3 / 4 / 5 / 6 mm, Phillips 2 / T25, a 60 mm extension tool.
- Come in a pocket bag for easy carry on ride.





# CHAIN RIVET EXTRACTOR

TB-CC66 / TB-CC65



TB-CC66A

**TB-CC66 PAT.**  
 Universal chain rivet extractor  
 • Fits all speed chains, such as 3/32" - 3/16" chains and 6-12 speed chains...etc.  
 • Innovation grip features with bits and 2 spare pins, a chain hook.  
 • Bits size: hex 3 / 4 / 5mm, Philips 2, T25.

**TB-CC66A**  
 Chain holder  
 • Replacement parts for TB-CC66.



TB-CC65A

TB-CC65B



Push the button to put on various chains on the cradle.



**TB-CC65 PAT.**  
 Universal chain rivet extractor  
 • 3-steps intuitive operation: push the button, put on the cradle and release the button. Then you can break various chains.  
 • Special design with an adjustable cradle can work on any chains accepted on the tool, including 3/32" - 3/16" single speed and 5 to 12 speed chains.  
 • Cradle can hold 4 links to ensure that user breaks/installs the chain stably and avoid the chain damaged as the chain is still installed on the bike.  
 • Round and firm wooden grip for superior operation experience.  
 • Cradle and pin are available for replacement.

**TB-CC65A**  
 Chain holder  
 • Replacement parts for TB-CC65.

**TB-CC65B**  
 T-handle  
 • Replacement parts for TB-CC65.



**TB-CC60 PAT.**  
 Tai-Chi chain rivet extractor  
 • Specifically designed for 10 & 11 speed chains.  
 • The patent designed chain pin guider (B-shaped part) and ergonomic design make removal and installation a breeze.  
 • With 1 spare pin and rivet peening tool.





**TB-CC50 PAT.**  
 Tai-Chi chain rivet extractor  
 • Specifically designed for 8, 9 & 10 speed chains with accurate size.  
 • The patent designed chain pin guider (B-shaped part) and ergonomic design make removal and installation a breeze.  
 • With 1 spare pin.



Tighten the nut before using.



**TB-CC30 PAT.**  
 Chain rivet extractor  
 • For 10 & 11 speed chains.  
 • With 1 spare pin & 1 chain pin guider with rivet peening function.



Always place the chain on the left cradle for breaking or assembly.

Topeen the rivet, place the chain on the right cradle.



**TB-CC20 PAT.**  
 Chain rivet extractor  
 • For 8, 9 & 10 speed chains.  
 • With 1 spare pin & 1 chain pin guider.



Push the pin guider to touch the pin chain firmly.




**TB-CC40 PAT.**  
 Chain rivet extractor  
 • For 1/8" to 3/16" BMX & single speed chains.  
 • With 1 spare pin & 1 chain pin guider.



Push the pin guider to touch the pin chain firmly.



**TB-3355**  
 Chain rivet extractor  
 • Economical tool for riders and home mechanics.  
 • For 3/32" to 3/16" chain and 8, 9 & 10 speed chains.  
 • The designed bolt helps to work smoothly on any chains, turn the bolt accurately to the chain pin and prevent the chain damaged.



To hold the chain by tightening the bolt. Make sure the bolt is locked accurately.



**TB-3370**  
 Chain rivet extractor  
 • Combines chain hook and rivet extractor.  
 • Work on 8, 9 & 10 speed chains and is an investment casting workhorse poured from high grade steel, heat-treated for high hardness and durable service.  
 • Easy to assemble and break the chain with chain hook.  
 • Uses the hole in the TB-3370's body to snap pilot end from replacement rivet.  
 • With 1 spare pin.



**TB-1103**  
 Replacement pin  
 • For all Super B chain rivet extractors.  
 • Set of 10 pcs.



**TB-3305** **NEW**  
 Chain rivet extractor  
 • For 410, 408 single speed and 6-10 speed chain.



**TB-3306** **NEW**  
 Chain rivet extractor  
 • For 410, 408 single speed and 6-10 speed chain.

**TB-3323 PAT.P****2 in 1 master link pliers-The Trident**

- Patent and award-winning design, the 2 in 1 master link pliers that allows master links installed and removed by single hand.
- Bold and simple is our philosophy. No complicated structure any more.
- Unique design and specially sized jaws to make removal and connection of master links quick and easy.
- Made of precision, high-grade steel and featuring cushion-grips for comfort.
- It's easy to use and built to last for professionals' daily use.

**TB-3326****2 in 1 chain checker and chain hook**

- Features with a precision chain checker can quickly and accurately indicate if the wear and stretch of the chain needs replacement.
- Made of stainless steel by accurate laser cutting.
- When chain with 0.75% and 1% wear, a replacement is suggested.
- Chain hook is a must for you to assemble or break the chain.

**TB-3327****3 in 1 gear system tool**

- A brilliant tool combines with chain hook, chain checker and freewheel checker.
- Easy for everyone to identify the condition of the chain and freewheel.
- A checkup is strongly suggested before long ride.
- For Shimano® HG / IG.

**TB-3328****Chain tensioner**

- Maintain chain tension on rear dropout.
- Available for all speed chain.

**TB-CH10****Chain keeper tool**

- A quick-release lever design to keep the chain under tension when the wheel is removed.
- Features to avoid chain tangled and frame scratched.
- Available for axle 9 mm & 10 mm rear dropout.

**TB-CH20****Chain keeper tool**

- A quick-release lever design to keep the chain under tension when the wheel is removed.
- Features to prevent chain tangled and frame scratched.
- Available for axle 9 mm & 10 mm rear dropouts, 130 mm & 135 mm in hub width.

**TB-1817****Ceiling / wall bike slider mount**

- Excellent bike storage solution for space saving.
- Ceiling or wall mounted bike rack.
- Slide the hook horizontally to store more bikes.
- Strong mount provides a stable and secure bike storage.
- Vinyl coated hook prevents the bike scratched.
- Includes 2 slider hooks (TB-1817A).
- Max load: 60 kg.

**TB-1817A****Slider hook**

- Spare parts for TB-1817 ceiling/wall bike slider mount.
- With plastic coating on the hook to avoid scratching the bike.
- Max load: 30 kg per hook.

**TB-CH35****Chain keeper tool with QR**

- Innovation tool keeps chain tensioned at rear dropout when the wheel is removed.
- Avoids the chain tangles and frame damaged while transporting the frame without wheel.
- Fits 12 mm thru axle.
- Adjustable design fits 130 mm to 150 mm in hub width.
- Includes a 5 mm quick release to work on rear dropout with 9 mm & 10 mm x 130 mm & 135 mm QR axles.

**TB-1200****Front wheel holder**

- Made of aluminum.
- Designed to prevent the handlebars and front wheel from rotating when a bike is mounted on a bike stand.
- It works on most road or mountain bikes.
- Vinyl coated hanger prevents scratching the bike.
- Range of hook opening: 9.5 cm - 23 cm.

**TB-1205****Handlebar holder**

- Prevents handlebar and front wheel from rotating or moving when the bike is stored or fixed.
- Suits for handlebar O.D. 1-1/8", top tube < 70 mm wide.

**TB-CH30****Chain keeper tool**

- Innovation tool keeps chain tensioned at rear dropout when the wheel is removed.
- Avoids the chain tangles and frame damaged while transporting the frame without wheel.
- Adjustable design fits 130 - 150 mm in hub width.
- Fits 12 mm thru axle.



**TB-ST11**  
Professional spoke tension meter

- The tension meter is a high-precision tool to measure spoke tensions and a necessity for any professional wheel builder.
- Fits most types of spokes.
- Used to precisely measure the spoke tension step by step during the wheel building process.
- Includes a blow case.
- Calibrate the meter by TB-ST01 if necessary.



**TB-7817**  
Adjustable pre-tension tool

- Allows for highly accurate and quick wheel pre-tensioning.
- Adjustable center pin for use with different spoke depths.
- Handle shape gives excellent tool control leading to more accurate tensioning.
- Larger diameter handle gives added mechanical advantage and comfort.
- Compatible with up to 60mm deep rims.
- The diameter of center pin is 1.6 mm.



**TB-5516, TB-5517, TB-5518, TB-5519**


#### Spoke wrench

- Double-ended spoke wrench, heat-treated for hardness.
- Unique and comfortable handle, made of soft plastic material.
- Spec:
- TB-5516 (black):** for 3.2 mm (0.127") and 3.5 mm (0.136").
- TB-5517 (orange):** for Shimano® wheel system 4.3 mm and 4.4 mm nipples.
- TB-5518 (yellow):** for Mavic® 9 mm threaded eyelets and Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple.
- TB-5519 (yellow):** for Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter, 7 mm thread nipple and the other end with pin spanner.



**TB-ST12**  
Spoke tension meter

- Measures the spoke tension on most types of spoke.
- Simply design is easy and quick to use and read.
- For anyone building or truing wheels.
- Calibrate the meter by TB-ST01 if necessary.

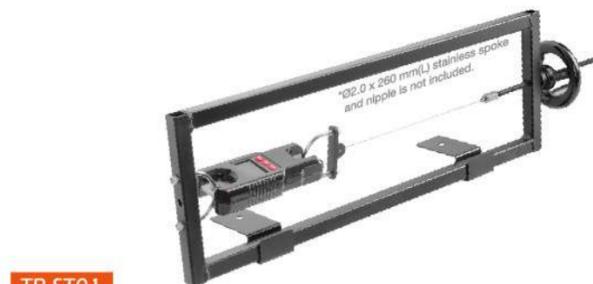

**TB-ST01**  
Spoke tension meter calibrator

- Calibrate the accuracy of spoke tension meter.
- For Super B TB-ST11, TB-ST12.



**TB-7811, TB-7812, TB-7813, TB-7814, TB-7815**

#### Internal nipple wrench

- Extra long driver reaches internal spoke nipples built in deep section of rim.
- Ergonomically T-handle makes it easy for operation.
- Spec:
- TB-7811:** length 110 mm with 4.8 mm hex socket.
- TB-7812:** length 110 mm with 5.5 mm hex socket.
- TB-7813:** length 110 mm with 6.0 mm hex socket.
- TB-7814:** length 110 mm with 3.2 mm square socket.
- TB-7815:** length 80 mm slotted end for conventional slit nipple.



**TB-1162**

#### Spoke, bearing and crank cotter gauge

- Made of stainless steel.
- A convenient aid for measuring the size of common bicycle parts.
- Put the head of the spoke into the oblong holes and measure the length on the scale easily.
- Also available to measure the size of ball bearings and cotter pins.

**TB-5523**

#### B-shaped spoke wrench

- Precision-sized spoke wrench for nipple size 3.2 / 3.3 / 3.5 / 4.0 mm.
- Made of stainless steel with heat treated for durability.
- B-shaped represents "Super B" philosophy: Super B only makes the BEST quality bike tools.



**TB-SW05**

#### 3 in 1 spoke wrench

- 3.2 / 3.3 / 3.5 mm.



**TB-5540, TB-5550, TB-5560, TB-5596, TB-5598**

#### Spoke wrench

- The precision-sized spoke wrenches are vinyl coated in five colors, handle with chrome plated hardened steel for durable service.
- Spec:
- TB-5540 (black):** for 3.2 mm (0.127") nipple.
- TB-5550 (green):** for 3.3 mm (0.130") nipple.
- TB-5560 (red):** for 3.5 mm (0.136") nipple.
- TB-5596 (yellow):** for Mavic® 6 splines of integrated nipples with 5.65 mm outside diameter and 7 mm thread nipple.
- TB-5598 (gray):** for Mavic® M7 nipple with 6.4 mm outside diameter.



**TB-SW20, TB-SW22**

#### Spoke wrench

- Spec:
- TB-SW20:** for 3.2 mm (0.127") nipple.
- TB-SW22:** for 3.5 mm (0.136") nipple.



**TB-5501**

#### Aero spoke key

- Steel core covered with nylon prevents the flat spokes turned when adjusting the nipple of spoke.
- A ring design makes easier and more stable operation when wearing on the finger.
- Fix Aero spoke, size: 0.9 / 1.1 / 1.3 / 1.9 mm.



**TB-5502**

#### Aero spoke key

- Deep slots fit wider Aero spokes.
- Steel core covered with nylon prevents the flat spokes turned when adjusting the nipple of spoke.
- A ring design makes easier and more stable operation when wearing on the finger.
- Aero spoke key 0.9 / 1.1 / 1.3 / 1.8 mm.



**TB-5510**

#### "O" spoke wrench

- Forged with 8 grooves to adjust spoke tension for 9 G - 15 G nipples.
- It is a very useful tool for DIY users.



**TB-5570**

#### Spoke wrench

- Updated with forge steel for precision and durability.
- Fit most common nipples, size: 3.2 mm (0.127"), 3.3 mm (0.130"), 3.5 mm (0.136").




**TB-5526**

#### Bottle opener

- Includes a 3.2 mm spoke wrench and a key ring.

**Y wrench**

Super B "Y" wrenches are designed for professional mechanics and daily shop use, made of heat-treated steel for superior durability, hardness and high torque for long last. Dual density molded handle is particularly contoured for leverage, comfort and control.

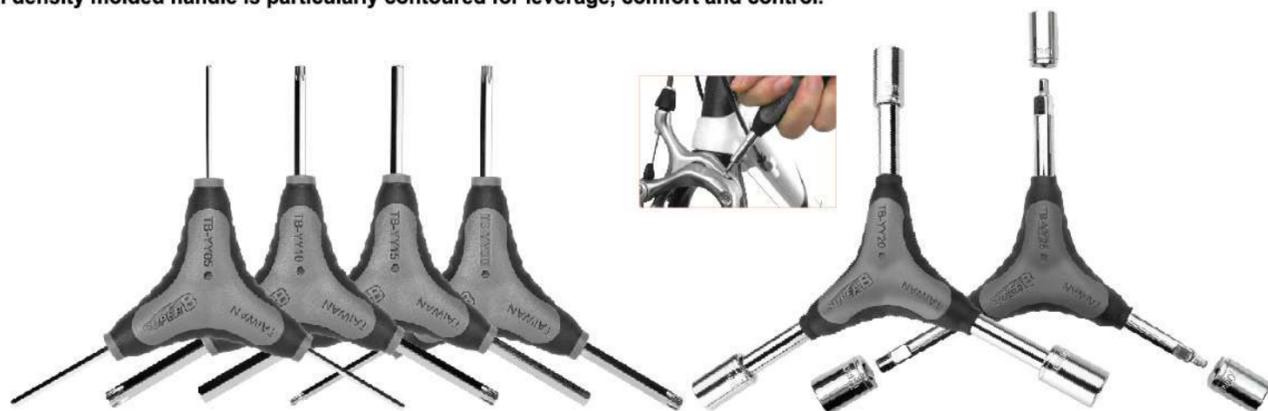

**TB-YY05~TB-YY30**

- Y wrench**
- Updated the structure of steel to stand with higher torque applied.
  - Spec:
    - TB-YY05: 2 / 2.5 / 3 mm hex key wrench.
    - TB-YY10: T25 / T30 / T40 Torx® wrench.
    - TB-YY15: 4 / 5 / 6 mm hex key wrench.
    - TB-YY20: 8 / 9 / 10 mm socket wrench.
    - TB-YY25 PAT.: 4 / 5 / 6 mm hex key wrench with 8 / 10 / 12 mm sockets.
    - TB-YY30: T10 / T25 / T30 Torx® wrench.



**TB-2618, TB-2628, TB-2638, TB-2648**

- Y wrench**
- Specially designed for riders and home mechanics.
  - Features heat-treated for hardness and quality consistency.
  - Specific sizes marked on hex key wrench that allow sizes to be quickly identified.
  - Spec:
    - TB-2618: 4 / 5 / 6 mm hex key wrench.
    - TB-2628: 2 / 2.5 / 3 mm hex key wrench.
    - TB-2638: T25 / T30 / T40 Torx® wrench.
    - TB-2648: 4 / 5 / 6 mm hex key wrench w/ ball end for easy access.

**TB-7535, TB-7540, TB-7545**

- Hex tool**
- An ergonomically-designed handle with a long hex for an excellent operation.
  - Suitable for disassembly of cranks, freewheel, hubs and pedals.
  - Made of high-grade steel, heat-treated for hardness.
  - Spec:
    - TB-7535: Hex 6 mm.
    - TB-7540: Hex 8 mm.
    - TB-7545: Hex 10 mm.

**TB-7254, TB-7256**

- Hex tool**
- Made of heat-treated high grade steel for hardness and durability.
  - Vinyl dipped and long handle for superior leverage and comfort.
  - TB-7254: Hex 14 mm is specially designed for Campagnolo® Power Torque™ crank bolt and freehub bodies from Shimano® XTR® and others.
  - TB-7256: Hex 15 mm fits Shimano® rear thru-axle freehub bodies.



**TB-TH05**

- Hex key wrench set**
- Size: 2 / 2.5 / 3 / 4 / 5 / 6 mm.
  - W/ an ergonomic holder / grip to use with.
  - Made of high-grade steel, heat-treated for hardness.

**TB-7253**

- 1/2" Dr. bit socket 10 mm hex wrench for Campagnolo®**
- Hex 10 mm long bit with 1/2" Drive to make the removal of Campagnolo® Ultra Torque™ semi-axle easier.
  - Superior heavy-duty steel designed for high torque applications.
  - Used with TB-TW30 3/8" Dr. torque wrench & bit socket set.



**TB-TH30**

- Hex key wrench set**
- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.
  - Ball-end wrench helps to guide the wrench for smooth entry and less slippage.
  - Made of high grade steel and heat-treatment for superior strength and durability.
  - High torque and high hardness for better durability.
  - Includes a durable and removable holder for portability.



**TB-TH35**

- Special hex key wrench set**
- For tightening and loosening the hex bolts.
  - Specially designed hex end provides extra engagement.
  - Saver for stripped or damaged hex bolts.
  - L-shaped hex wrench w/ 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.

**TB-TH06, TB-TX06**

- 4 in 1 key wrench set**
- Features heat-treated steel for hardness and quality consistency.
  - Spec:
    - TB-TH06: 3 / 4 / 5 / 6 mm hex key wrench.
    - TB-TX06: T15 / T20 / T25 / T30 Torx® wrench.

**TB-7610~TB-7650**

- T/L handle Torx® wrench**
- Spec:
    - TB-7610: T10. TB-7615: T15. TB-7620: T20. TB-7625: T25.
    - TB-7630: T30. TB-7640: T40. TB-7645: T45. TB-7650: T50.



**TB-76165**

- T/L handle Torx® wrench set**
- The trendy and unique T/L handle Torx® set is specially designed by Super B.
  - Includes: T10 / T15 / T20 / T25 / T30 / T40 / T45 / T50.

**TB-7705, TB-7715**

- Hex key wrench set**
- An economical hex key wrench set, heat-treated steel for hardness.
  - Especially ball-end wrenches of this set help with easy access and less slippage.
  - Ball-end wrench sizes are 4 mm, 5 mm and 6 mm.
  - Includes durable plastic wrench holder.
  - Spec:
    - TB-7705: 2 / 2.5 / 3 / 4 / 5 / 6 mm.
    - TB-7715: 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm.

**TB-7631~TB-7638**

- T/L handle hex wrench**
- Spec:
    - TB-7631: 2 mm. TB-7632: 2.5 mm. TB-7633: 3 mm.
    - TB-7634: 4 mm (ball-end). TB-7635: 5 mm (ball-end). TB-7636: 6 mm (ball-end).
    - TB-7637: 8 mm (ball-end). TB-7638: 10 mm (ball-end).



**TB-76160**

- T/L handle hex wrench set**
- The trendy and unique T/L handle hex set is specially designed by Super B.
  - Includes: Hex 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm.

### Super B Premium freewheel tools

- Secure the cassette while loosening the locking for removal, with dual density molded handle is particularly contoured for great leverage, comfort and control. This is a essential tool for shops or home mechanics.
- Use chain whip pliers / freewheel turner with freewheel remover to loosen sprockets.



**TB-FW40 PAT.** Premium

#### Chain whip pliers

- Super B patented to secure the cassette by one hand easily and quickly.
- Adjustable opening so it is suitable for sprockets with cogs from 10-17 teeth, compatible for 5-11 speed.
- Fixed with a spring to lock the sprocket fast and firm without slipping away.
- Prevent the sprocket deformed and protect your hands from injuries while using.



**TB-FW10 PAT.** Premium

#### Freewheel turner and sprocket removal tool

- Made of heat-treated high-grade steel Cr-Mo and extra long, professional quality freewheel turner and sprocket removal tool provides you superior leverage.
- Features a hook to fit lockings.
- Compatible with 5 to 10 speed cassette.
- Use with freewheel remover, such as TB-FW30/ TB-FW36 / TB-CP15 / TB-1445 / TB-1465 to loosen sprockets .



**TB-FW20, TB-FW22** Premium

#### Freewheel turner

- Use with freewheel remover, such as TB-FW30 / TB-FW36 / TB-CP15 / TB-1445 / TB-1465, to loosen sprockets of cassettes.
- Spec:  
TB-FW20: Fits 5-10 speed cassettes.  
TB-FW22: Fits 10-12 speed cassettes.

### FIT E-BIKE AS WELL!



**TB-FW55 PAT.** Premium

#### Chain whip pliers plus

- Holds the front chainring for E-bike when removing the locking.
- Secures the sprocket when loosening the locking.
- Adjustable opening so it's suitable for sprocket from 18T ~ 34T & 35T ~ 53T.
- Protects the sprocket from deforming and your hands from injuries.



**TB-FW36** Premium

#### Freewheel remover

- For Shimano® and some Shimano® disc brake system, Chris King®, SRAM®, SunRace®, SunTour® and some other freewheels.
- Fits Shimano® 12 internal splines disc brake lockings.
- One piece grip designed for comfortable and handy use.
- Use with chain whip pliers TB-FW40, TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.
- Features a 12 mm guide pin to remove / install cassette lockings from thru-axle hubs stably.



**TB-FW30** Premium

#### Freewheel remover

- Features a guide pin to work more stable.
- Compatible for Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and other cassette lockings and as well as some Shimano® disc brake system lockings.
- Fits Shimano® 12 internal splines disc brake lockings.
- Use with chain whip pliers TB-FW40, TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



**TB-CP15** Premium

#### Freewheel remover & bottom bracket tool

- Made of CNC machined, heat treated high grade steel.
- Suitable for Campagnolo® bottom bracket cups and also for Campagnolo® cassette lockrings ( Record™, Chorus™, Athena™ ).
- Use with chain whip pliers TB-FW40, TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



**TB-FW50 PAT.** Premium

#### Freewheel removal tool

- Solid locking handle fixes on sprocket easily.
- Super B patent jaw cogs 10-23 teeth 5-11 speed sprocket firmly and easily.
- Single hand operating makes the other hand free to operate freewheel remover.
- Protects your hands from injuries while using.
- Use with freewheel remover, such as TB-FW30 / TB-FW36 / TB-CP15 / TB-1445 / TB-1465 to loosen sprockets.



**TB-CP10** Premium

#### Freewheel remover

- Made of heat-treated steel Cr-Mo for hardness and durability.
- Ideal for professional users and home mechanics.
- Compatible for Shimano® Capreo.

### Super B Classic freewheel tools

- Features with classic orange and black molded handle for home mechanics and riders.
- Use chain whip pliers / freewheel turner with freewheel remover to loosen sprockets.



**TB-1445**

#### Freewheel remover

- Features with a guide pin to work more stable.
- Suitable for Shimano®, SunRace®, SRAM®, Chris King®, SunTour®, other cassette lockings and some Shimano® disc brake system lockings.
- Fits Shimano® 12 internal splines disc brake lockings.
- Use with chain whip pliers TB-FW40 / TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



**TB-1465**

#### Freewheel remover & bottom bracket tool

- Suitable for Campagnolo® cassette lockrings and Campagnolo® Record™, Chorus™, Athena™ B.B. cups.
- Use with chain whip pliers TB-FW40 / TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



**TB-8860, TB-8866, TB-8868**

#### Freewheel turner

- Use with freewheel remover, such as TB-FW30 / TB-FW36 / TB-CP15 / TB-1445 / TB-1465 to loosen sprockets.
- Spec:  
TB-8860: for 5-10 speed cassettes.  
TB-8866: for 1/8" fixed gear cassette.  
TB-8868: for 11 speed and as well as 9 to 10 speed cassettes.



NEW

**TB-CR30 PAT.P**  
 2 in 1 Crank tool

- Allows E-bike chain to run backwards while the E-bike applied lubricant or simple maintenance.
- Easily placed between the chainring and drive side of crank.
- Extra tool for crank dust cap.
- Fits most type of E-bike with mid-drive motor.


**TB-6616**
**Cotterless crank tool**

- For standard square type crank.
- Use with a 8 mm hex key wrench or 15 mm spanner.


**TB-6617**
**Cotterless crank tool**

- For Shimano® octalink and ISIS Drive® system.
- Use with a 8 mm hex key wrench or 15 mm spanner.


**TB-6618 PAT.**
**2 in 1 cotterless crank tool**

- Features with 14 mm box wrench.
- Super B patented tool to remove crank arms for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- Fine thread helps you remove cranks smoothly and easily.
- Use with a 8 mm hex key wrench or 15 mm spanner.


**TB-6485 PAT.**
**2 in 1 cotterless crank tool**

- Designed for riders and home mechanics.
- Super B patented tool to remove crank arms for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- Comfortable handle, fine thread for excellent leverage.


**TB-CR10 PAT.**
**2 in 1 cotterless crank tool**

- Super B patented tool to remove crank arms for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- Fine thread and a built-in dual density molded handle is particularly contoured for comfort, control and smooth.


**TB-CR20 PAT.**
**2 in 1 cotterless crank tool**

- Super B patented tool to remove crank arms for both standard square type and Shimano® octalink, ISIS Drive® system, Power Spline or Power Drive bottom bracket interface.
- Fine thread and a built-in dual density molded handle is particularly contoured for comfort, control and smooth.
- Features with both 14 mm socket & 6 / 8 mm hex wrench for crank bolt and pedals.


**TB-CB10**
**Crank bolt wrench**

- A built-in dual density molded handle is particularly contoured for comfort and smooth.
- Features with both 14 mm & 15 mm sockets.


**TB-CB20**
**Crank bolt wrench**

- A built-in dual density molded handle is particularly contoured for comfort, control and smooth.
- Features with both 14 mm socket and 8 mm hex wrench.
- Long handle helps you easily disassemble crank bolts without taking pedals off.

TB-PD55


**TB-PD55**
**Professional pedal wrench 15 mm**

- Unique bending designed for professional mechanics daily use to loosen the bolts on pedal easier.
- Extra-long handle (18.5") provides great leverage to remove the stubborn pedals.
- Innovative two openings is to remove both side of pedals at different angles and side edge designed to access all wrench flats easily.
- Made of heat-treated high grade steel high-grade steel for hardness and laser cutting for accuracy.

**TB-PD10**
**Professional pedal wrench 15 mm**

- Unique bending designed for professional mechanics daily use to loosen the bolts on pedal easier.
- Innovative two openings is to remove both side of pedals at different angles and side edge designed to access all wrench flats.
- Made of heat-treated high grade steel Cr-Mo for hardness and laser cutting for accuracy.

**TB-PD30**
**Professional pedal wrench 15 mm**

- Compact size pedal wrench 15 mm is designed for take-along and easy-to-use.
- Side edge designed to access all wrench flats easily.
- Made of heat-treated high grade steel Cr-Mo for hardness.

TB-PD10



TB-PD30


**TB-MW50**
**Multi-function pedal wrench**

- Features with a 15 mm pedal wrench and 14 / 15 mm sockets with dual density molded handle, which is particularly contoured for comfortable application.
- Made of heat-treated high grade steel SK5 for hardness.


**TB-MW60**
**Multi-function pedal wrench**

- Features with a 15 mm pedal wrench and 8 / 10 mm hex key wrench with dual density molded handle, which is particularly contoured for comfortable application.
- Made of heat-treated high grade steel SK5 for hardness.


**TB-8455**
**Pedal wrench**

- Designed for riders and home mechanics.
- Precision sized for 15 mm pedal and heat-treated steel for hardness.
- Dual density molded handle is particularly contoured for leverage, comfort and smooth.


**TB-8625**
**Double-ended pedal wrench**

- Long ergonomic handle provides great leverage and save power.
- Made of heat-treated high grade steel for hardness and laser cutting for accuracy.
- For 15 mm pedal.
- Length: 34 cm.


**TB-PD35**
**Dummy pedal**

- Ideal for bike repair and assembly for those bikes without pedals installed.
- Most new bikes come without pedals.
- TB-PD35 is a handy tool for mechanics to make adjustments during bike assembling.
- It's quickly installed on each crank and suitable for 1/2" and 9/16".



### Super B Premium bottom bracket wrenches

- Feature with unique bending to access to the bottom bracket and comes with a crank installation tool, engages 8 internal splines of crank arm cap and use with a hex wrench to take off easily.
- Made of heat-treated high grade steel with dual density molded handle particularly contoured for leverage, comfort and control.



#### TB-BB10, TB-BB11

##### Bottom bracket wrench

- One end wrench engages 16 notches of bottom bracket cups.
- Disassemble and install Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque, TOKEN® and many other external bearing crank set bottom brackets.
- Spec:  
TB-BB10: Bottom bracket wrench includes a crank installation tool.  
TB-BB11: Includes TB-BB10, a crank installation tool.  
Adaptor TB-BB18 for Shimano® SM-BB9000, SM-BB93 & TOKEN®.  
Adaptor TB-BB19 for Shimano® SM-BBR60.



#### TB-BB15, TB-BB16

##### Bottom bracket wrench

- One end wrench engages 16 notches of bottom bracket cups.
- Attached a crank installation tool.
- Spec:  
TB-BB15: To disassemble and install Shimano® SM-BB9000, SM-BB93 & TOKEN®.  
TB-BB16: To disassemble and install Shimano® SM-BBR60.



#### TB-BB30

##### Cartridge B.B. tool

- Features a guide pin to work more stable.
- Made of CNC machined heat-treated high grade steel.
- Suitable for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Truvativ® and TOKEN®.



#### TB-BB40, TB-BB41

##### Bottom bracket wrench

- The socket can increase contact area between wrench and B.B. shell, especially for lightweight B.B.
- Disassemble and install Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque, TOKEN® and many other external bearing crank set bottom brackets.
- Fits Shimano® 16 notch rotor disc lockrings.
- Spec:  
TB-BB40: Bottom bracket wrench includes a crank installation tool.  
TB-BB41: Includes TB-BB40, crank installation tool.  
Adaptor TB-BB18 for Shimano® SM-BB9000, SM-BB93 & TOKEN®.  
Adaptor TB-BB19 for Shimano® SM-BBR60.



#### TB-CP15

##### Bottom bracket tool & freewheel remover

- Made of CNC machined heat-treated high grade steel.
- Suitable for Campagnolo® cassette lockrings and Campagnolo® Record™, Chorus™, Athena™ bottom bracket.
- Use with chain whip pliers TB-FW40 / TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



#### TB-HB50

##### Locking wrench

- Suitable for most lock-rings of bottom brackets.
- Made of heat treated high-grade steel, laser cutting for easy assembly and suitable for racing or time trial bike especially.



#### TB-BB18, TB-BB19

##### B.B. wrench adaptor

- Use to attach on B.B. wrench TB-BB10 / TB-BB40 / TB-1005 / TB-8919.
- Spec:  
TB-BB18: for Shimano® SM-BB9000, SM-BB93 & TOKEN®.  
TB-BB19: for Shimano® SM-BBR60.



#### TB-8919, TB-8920

##### B.B. wrench

- Features with classic orange and black molded handle for home mechanics and riders.
- To disassemble and install Shimano® Hollowtech II, Truvativ® GXP, FSA® MegaExo, Campagnolo® Ultra-Torque, TOKEN® and many other external bearing crank set bottom brackets.
- Attached a crank installation tool which engages 8 internal splines of the crank arm adjustment cap.
- Spec:  
TB-8919: Bottom bracket wrench includes a crank installation tool.  
TB-8920: Includes TB-8919, crank installation tool.  
Adaptor TB-BB18 for Shimano® SM-BB9000, SM-BB93 & TOKEN®.  
Adaptor TB-BB19 for Shimano® SM-BBR60.



#### TB-1455

##### Cartridge B.B. tool

- Features with classic orange and black molded handle for home mechanics and riders.
- Features a guide pin to work more stable.
- Suitable for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, RaceFace®, Truvativ® & TOKEN®.



#### TB-1465

##### Freewheel remover & bottom bracket tool

- Features with classic orange and black molded handle for home mechanics and riders.
- Suitable for Campagnolo® cassette lockrings and Campagnolo® Record™, Chorus™, Athena™ bottom bracket.
- Use with chain whip pliers TB-FW40 / TB-FW50 or freewheel turner TB-FW10 / TB-FW20 / TB-FW22 / TB-8860 / TB-8866 / TB-8868 to loosen sprockets.



#### TB-8913

##### B.B. wrench

- Suitable for professional users and home mechanics.
- For 36 mm box-ended and bottom bracket cup with "raised" 16 mm wrench flats.



#### TB-BB20

##### Double-ended bottom bracket locking hook spanner

- Made of heat-treated Cr-Mo steel with accurate laser cutting for hardness and durability.
- The hook spanner with 3 notches is for better engagement in the lockrings and the other is a single hook.



#### TB-8015

##### B.B. cup tool

- Replaceable and adjustable pins for heavy-duty use allowed to use on B.B. cup.



#### TB-8018

##### B.B. cup and freewheel tool

- Replaceable and adjustable pin for heavy-duty use on B.B. cup and freewheel.
- 2.8 mm for B.B. cup and 2.2 mm for freewheel.



#### TB-8912

##### B.B. wrench

- To install and remove 6-notch cartridge cups on Campagnolo® (Veloce™, Mirage™, Centaur™, Daytona™ and Avanti™) sealed cartridge bottom brackets.
- Vinyl coated handle provides comfortable application.



#### TB-8911, TB-8911A

##### Crank installation tool

- Engages 8 internal splines of the crank arm adjustment cap.
- Use with 6 mm hex key to remove and install crank arm adjustment cap.
- Spec:  
TB-8911: Material - nylon.  
TB-8911A: Material - aluminum.

## BOTTOM BRACKET TOOL



TB-1076



TB-1074



TB-1068



TB-1005



TB-1060



TB-1075



TB-1065



TB-1066



TB-1080

### TB-1076

#### B.B. tool

- Made of aluminum with two functions.
- Fits Enduro® T47 and PF30: 16-notch 52.2mm OD.
- Fits Chris King® ThreadFit™ T47 and ThreadFit™ 30: 12-notch 50.4 mm OD.
- Use with 1/2" Dr. ratchet wrench.

### TB-1005

#### B.B. tool

- It is used to disassemble and install Shimano® Hollowtech II, Truvativ®, FSA® MegaExo, Campagnolo® Ultra-Torque™, and TOKEN®, GXP®, SRAM®, SunRace®, other similar external bearing crank set bottom brackets.
- Fits Shimano® 16-notch rotor disc lockrings.
- Use with a 32 mm wrench, 1/2" Dr. ratchet wrench.

### TB-1060

#### Cartridge B.B. tool

- For Shimano®, Truvativ®, SRAM® and all ISIS® 8-notch bottom bracket cups.
- Use with a 32 mm wrench, 1/2" Dr. ratchet wrench.

### TB-1065

#### Cartridge B.B. tool

- Suitable for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face®, Truvativ® and TOKEN®.
- Use with a 24 mm wrench, 1/2" Dr. ratchet wrench.

### TB-1066

#### B.B. tool

- Designed to hold socket to bottom bracket axle to prevent slippage during installation or removal.
- Fits both square tapered axles and Shimano® octalink and ISIS Drive® system.

### TB-1074

#### Shimano® locking / B.B. tool

- Remove and install Shimano® XTR® FC-M9100 / FC-M9120, XT® 8120, MT900 and other Shimano® direct mount chainring lockrings.
- Fits 16-notch external bearing bottom bracket Shimano® SM-BBR60.

### TB-1068

#### B.B. tool

- Made of precision CNC machined aluminum tool to install and remove 12-notch external bearing bottom brackets.
- 46mm 12 notch OD cup to install and remove Race Face® Cinch™, Rotor® BSA30, Zipp® Vuma™, Hawk Racing™ BB3086, SRAM DUB and many other 12 notch external bearing bottom brackets.

### TB-1075

#### Cartridge B.B. tool

- Suitable for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face® and Truvativ®.
- Use with a 1/2" Dr. air driver.

### TB-1080

#### Cartridge B.B. tool

- Suitable for Shimano®, ISIS Drive® splined 20-tooth bottom bracket cups, FSA®, Race Face® and Truvativ®.
- Use with 32 mm wrench.

## FREEWHEEL REMOVER



TB-1010



TB-1018



TB-1015



TB-1020



TB-1021



TB-1030



TB-1085



TB-1050



TB-1055



TB-1090



TB-1095



TB-1045



TB-1025



TB-1035

### TB-1010

#### Freewheel remover

- Removes Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and other cassette lockrings.
- Fits some Shimano® disc brake system lockrings.
- Use with a 21 mm wrench or 1/2" Dr. ratchet wrench.

### TB-1015

#### Freewheel remover

- Removes Shimano® HG cassettes, SunRace®, SRAM®, Chris King®, SunTour® and other cassette lockrings.
- Fits some Shimano® disc brake system lockrings.
- Use with 24 mm, 19 mm wrench or 1/2" Dr. ratchet wrench.

### TB-1018

#### Shimano® freewheel body tool

- Features freewheel body disassembly for maintenance.
- For most of Shimano® hubs.
- Use with a 24 mm wrench or 1/2" Dr. ratchet wrench.

### TB-1020

#### Freewheel remover

- Features a guide pin to work more stable.
- Removes Shimano®, SunRace®, SRAM®, Chris King®, SunTour® and other cassette lockrings and some Shimano® disc brake system lockrings.
- Fits Shimano® disc brake lockrings with 12 internal splines.
- Use with a 24 mm wrench.

### TB-1021

#### Freewheel remover

- For Shimano®, SRAM®, Sun Race®, Sun Tour®, Chris King® and other cassette lockrings with 12 mm diameter thru axle hub.
- Features a 12 mm guide pin to stabilize the tool when removing / installing cassette lockrings from thru axle hubs.

### TB-1025

#### Freewheel remover

- Removes all SunTour® 4-notch freewheels.
- Use with a 24 mm wrench.

### TB-1030

#### Freewheel & B. B. tool

- Removes for all Campagnolo® cassette lockrings (Record™, Chorus™, Athena™, Centaur™) and also for Campagnolo® bottom bracket cups.
- Use with 1/2" Dr. ratchet wrench and a 21 mm wrench.

### TB-1035

#### Freewheel remover

- Removes all SunTour® 2-notch freewheels.
- Use with a 23 mm wrench.

### TB-1045

#### Freewheel remover

- Removes Shimano® MF freewheels.
- Use with a 24 mm wrench.

### TB-1050

#### Freewheel remover

- Removes 4-notch BMX freewheels & single-speed freewheels from hubs with 12T, 14T and 13T.
- Use with a 24 mm wrench.

### TB-1055

#### Freewheel remover

- Removes 2-notch BMX & single-speed freewheels.
- Use with a 24 mm wrench.

### TB-1085

#### Freewheel remover

- Removes Shimano® MF freewheels.
- Use with a 21 mm wrench or 1/2" Dr. ratchet wrench.

### TB-1090

#### Freewheel remover

- Removes 2-notch single speed, 30 mm diameter freewheels.
- Use with a 24 mm wrench.

### TB-1095

#### Freewheel remover

- Removes 2-notch single speed, 1-3/8" diameter freewheels.
- Use with a 24 mm wrench.



**E-BIKE LOCKRING TOOL**

	TB-1067	TB-1069	TB-1071	TB-1073
System	Bosch®	Bosch®	Shimano®	Bosch®
Spec.	Gen. 2 Active Line, Performance Line, Performance Line CX from 2014 to 2017	Gen.3-4 Active Line (2018) Active Line Plus, Performance Line (MY19/20) (MY20) Performance Line (MY19/20) (MY20) (bdu 3 X X) (bdu 4 X X)	STEPS E8000, E7000, E6100 series	Gen. 1, Classic Line, Classic + from 2010 to 2013
Lockring dia.	51 mm	41.5 mm	--	59.9 mm



**TB-1900B, TB-1927B**  
**TB-1928B, TB-1929B**

**B.B. installation tool**

- Includes press fits to fit various bearings.
- Spec:
  - TB-1900B:** install BB86, BB30, BB90 and BB92 bearings.
  - TB-1927B:** install BB86 bearings.
  - TB-1928B:** install BB30 bearings.
  - TB-1929B:** install BB90 and BB92 bearings.



**TB-1929A**

**Head cup and B.B. removal tool**

- Accept most 24 mm - 30 mm internal diameter press fit bottom bracket bearings.
- Fits 7/8" external head cups of balance bike.



**TB-19002, TB-19003**

**B.B. installation / removal tool sets**

- New way to press out the press fit BB from frame without concern of frame damaged.
- Spec:
  - TB-19002:** 2 in 1 BB installation. Install and remove press fit 24 mm and 30 mm bottom brackets (BB30, BB86, BB90 and BB92).
  - TB-19003:** 4 in 1 BB installation. Install and remove press fit 24 mm / 30 mm / 28.99 mm / 22 mm bottom brackets (BB30 & BB86 & BB90 & BB92 & DUB28.99 & SRAM® 22 mm BB).



**TB-19001**

**B.B. installation tool**

- Install press fit bottom bracket BB30, BB86, BB90, and BB92.
- Use with 17 mm open wrenches.



**TB-1927A, TB-1928A**

**B.B. removal tool**

- Spec:
  - TB-1927A:** Remove BB86, BB90 and BB92 bearings and other 24 mm axle bearings, includes 3 rubber O-rings for replacement.
  - TB-1928A:** Remove BB30 bearings and other 30 mm axle bearings, includes 3 rubber O-rings for replacement.



**TB-1915-3 PAT.**

**Bike storage stand**

- Design for the thru axle without lever.
- Super B patented to hold the bike at different weights.
- Economical storage stand, easy to open and use.
- Accepts the rear wheel axle for routine maintenance such as chain lubricating, derailleur adjustment or for storage and display.
- Fits wheels from 20" - 29" size.
- For most of Shimano®, Campagnolo® and common wheelsets.



**TB-1915-2 PAT.**

**Bike storage stand**

- Super B patented to hold the bike at different weights.
- Economical storage stand, easy to open and use.
- Accepts the rear wheel axle for routine maintenance such as chain lubricating, derailleur adjustment or for storage and display.
- Fits wheels from 20" - 29" size.
- For most of Shimano®, Campagnolo® and common wheelsets.
- Update to support hole size greater than 4 mm.

**Economical**

**TB-1812**

**Bike rack**

- Designed to mount on wall to store a bike easily.
- Max load: 20 kg.



**TB-1633**

**Economical work & display stand**

- For bike storage and maintenance fast and easy.
- Holders are adjustable in height to fit 20" - 29" wheels.

**TB-1964**

**Economical foldable bike rack**

- Mounted on wall for bike storage at home, garage or apartment.
- Vinyl coated hanger prevents the bike frame from scratches.
- Allows the hooks to pivot or to be fixed upon the demand of your bike.
- Updated hook can accept bike tube diameter upto 70 mm.
- Max load: 20 kg.



**TB-1635**

**Hollow crank bike stand**

- Designed to rotate the pedal freely when the stand is in use.
- Vinyl coated design can accommodate crankset with 20 mm crank axle without scratches.
- The quick and lightweight solution is easy to use for bike maintenance and storage.

Perfect for home storage, in-store display, and garage storage.  
Superior quality free-standing design will not scratch your ceiling.  
Made of high quality aluminum tube.

**TB-SS20****Wheelset display stand**

- Tripod base for portability.
- Made of lightweight aluminum tube.
- Includes 6 wheelset hangers (TB-SS20A).
- Adjustable in height from 1.1 – 2.13 meter.
- Max load: 2 kg / per hanger.
- Accepts up to 10 hangers.

**TB-SS20A****Wheelset hanger**

- Optional for TB-SS20.
- Designed for displaying wheelsets in exhibition and shop.
- Slot of hanger accepts any wheels with hub 9 / 10 mm, including quick release, thru axle, road bike or MTB.
- Max load: 2 kg per hanger.
- Set of 6 pcs.

**TB-SS22****Wall mounting wheelset hanger**

- Designed for exhibition and shop wheelset display.
- Easy and quick to be mounted on wall or put on slot wall within a few minutes.
- Slot of hanger accepts any wheels with hub 9 / 10 mm, including quick release, thru axle, road bike or MTB.
- Max load: 2 kg per hanger.
- Set of 6 pcs.

**TB-1965C****Table of storage stand**

- Optional for TB-1965, TB-1967 and TB-1968 storage stands.
- Available tubes 38 mm ~ 45 mm in outer diameter.

**TB-1965B****Bicycle hanger**

- Optional for Super B storage stands, including TB-1965, TB-1967 and TB-1968...etc.

**TB-1968****Storage stand**

- Tripod base for portability.
- Made of lightweight aluminum tube.
- Includes 2 hangers (TB-1965B) to hold up 2 bikes.
- Max load: 18 kg per hanger.
- Adjustable in height from 1.1 – 2.13 meter.

**TB-1965, TB-1967****Storage stand**

- One-leg base fixed from floor to ceiling.
- Made of lightweight aluminum tube.
- Includes 2 hangers (TB-1965B) to hold up 2 bikes.
- Max load: 18 kg per hanger.
- Spec:  
TB-1965: adjustable in height from 1.85 ~ 3.2 meter.  
TB-1967: adjustable in height from 2.00 ~ 3.5 meter.

**TB-SS10, TB-SS11****Professional storage stand**

- Multi-function stand for cycle exhibition, bike shop, bicycle club, team racing and sidewalk storage.
- Easy to assemble the optional extender kit to hold more bikes.
- Tripod base features moving freely and stably.
- Features:  
Max load: 120 kg.  
Adjustable in height: 90 cm ~ 120 cm.  
Adjustable in width: 120 cm ~ 240 cm.
- Spec:  
TB-SS10: W/ a carry bag.  
TB-SS11: W/o a carry bag.

**TB-SS10A****Storage stand extender kit**

- Optional for TB-SS10.
- Extends the width of TB-SS10 / TB-SS11 by 240 cm, allows up to 12 additional bikes to be held.

**TB-SS30****Portable storage stand**

- Practical take-along storage stand, lightweight is easy to fold up compactly for storage.
- Features quickly setting up simply with bare hand.
- Multi-function stand for cycle exhibition, bike shop, bicycle club, team racing and sidewalk storage.
- Designed for storage and holding bikes easily.
- Height: 106 cm.
- Width: 120 cm.
- Max load: 60 kg.



TB-1959

**Fat bike storage stand**

- Optimized for fat bike with tire width from 3" - 5".
- Comes with modular connector to attach multiple storage stands to display or store bikes.


Especially for E-bike and heavy bike.



TB-1909, TB-1909-1

**Deluxe storage stand (double supporter)**

- Double supporter of tubular folding stand designed for storing and displaying bicycles.
- Spring-loaded stabilizer arm holds the tire more stable.
- Holds front or rear wheel firmly and without scratching the surface of bike frame.
- Wheel slot fits most types of bikes, such as road bike, MTB, BMX, Cross, especially E-bike and heavy bike.
- Fits on wheelset size 20" - 29" and tire width up to 2.3".
- Spec:
- TB-1909: w/ normal pads.
- TB-1909-1: w/ modular connectors to link more storage stands.



Hang adaptors for storage

TB-1957

**NEW****E-bike storage stand**

- Fits most E-bikes & bikes with tire width up to 5".
- Comes with modular connector to attach multiple storage stands to display or store bikes.
- Install adaptors for tire width under 3".

TB-1907 PAT.

**2 in 1 display stand**

- Unique design is to display and demonstrate at shop and exhibition.
- Features reversible and adjustable height holder to accept rear wheels.
- Double-ended holder is coated with soft and flexible TPR to prevent scratching the bike.
- One-end is specially designed to accept bike installed on disc brake.
- Fits wheel size from 24" - 29".



TB-1908-1

TB-1908, TB-1908-1

**Deluxe storage stand**

- Tubular folding stand designed for storing and displaying bicycles.
- Spring-loaded stabilizer arm holds the tire stable.
- Holds front or rear wheel firmly and without scratching the surface of bike frame.
- Wheel slot fits most types of bikes, such as road bike, MTB, BMX, Cross, especially E-bike and heavy bike.
- Fits on wheelset size 20" - 29" and tire width up to 2.3".
- Spec:
- TB-1908: w/ normal pads.
- TB-1908-1: w/ modular connectors to link more storage stands.

**Work stand**

Super B has various selections of work stand, including of models for professionals and home mechanics. Every product has its unique characteristic with durability as our original intention for mechanics daily repairs.

TB-DS10  
Digital scale

TB-WS12

**Work stand base**

- Heavy steel, weight up to 28 kg.
- Size: 63 x 61 x 3 cm.
- Optional for TB-WS40.



TB-WS40

**Professional fixed work stand**

- Heavy duty base or floor mounted design for workshop daily use.
- Clamp height can be adjusted from 100 to 150 cm.
- Weight: 5.43 kg.
- Max load: 50 kg.
- Tools on tray, work stand base (TB-WS12) and digital scale (TB-DS10) are not included.
- Tool tray is included.

TB-WS50

**Essential work stand for E-bike**

- Clamp can be positioned at 5 directions.
- Adjustable in height, 110 - 150 cm.
- Max load: 50 kg.
- Tool tray is not included.

For E-bike.

Economical

**NEW**

TB-WS55

**Easy lift work stand**

- Ergonomically-friendly, easily adjusting from the floor to 200 cm.
- Helps mechanics to lift heavy bike easily at ideal posture for repairs of all bicycle areas.
- Rotating shaft allows lifting bikes up and down 3 cm at each full cycle.
- Heavy duty base design for work shop daily use.
- Rotatable clamp for easy maintenance to different part of the bicycle.
- The strong and stable size is perfect for lifting heavy E-bikes or for mechanics with lifting limitations during repairs or set up.
- Max load: 60 kg.



**TB-WS65****NEW****Home mechanic work stand**

- Heavy duty structure for long last.
- Foldable clamp and legs for portable use and storage.
- Max load: 40 kg.
- Tool tray is included.

**TB-WS20****Home mechanic work stand**

- Clamp height can be adjusted from 106 to 144 cm.
- No tools required to set up for bike maintenance or fold for storage.
- Made of aluminum for lightweight.
- Weight: 6.18 kg.
- Max load: 35 kg.
- Tool tray is included.

**TB-WS30****Premium****Professional work stand**

- Clamp height can be adjusted from 111 to 154 cm.
- No tools required to set up for bike maintenance or fold for storage.
- Tripod base is designed for superior stability.
- Made of aluminum for lightweight.
- Weight: 6.1 kg.
- Max load: 40 kg.
- Tool tray is included.

**TB-WS20A****Clamp inlay**

- Made of environmental friendly plastic, TPR.
- Spare parts for Super B work stands.
- Set of 2 pcs.

**TB-WS20B****Knob**

- Spare parts for Super B work stands.

**TB-WS30A****Base pad**

- Spare parts for Super B tripod work stands.

**TB-WS11****Tool tray**

- Deep-walled compartments and various slots are convenient for the storage of tools.
- Keeps spare parts and lubricants close at hand.
- Spare parts for all Super B work stands.

**Evolution****NEW****TB-WS60****Premium****Professional work stand**

- Holder works with axle systems including:
  1. Quick release: 9 / 10 mm diameter x 100 / 130 / 135 mm length.
  2. Thru-axles: 10-20mm diameter.
- 360° horizontal and 120° vertical rotation for easy maintenance to different part of the bicycle.
- Made of light aluminum.
- Adjustable height of 85cm to 110 cm.
- Main beam is adjustable fore and aft 70 cm length and up / down angle.
- Folds quickly and compactly for easy transport.
- Max load: 25 kg.
- Tool tray is included.

**TB-WS10****Premium****Professional work stand**

- Hold the bike with both axle 9 mm x 100 mm front dropout and 9 mm x 130 mm rear dropout.
- Rotates 360° for easy maintenance to different part of the bicycle.
- Made of lightweight aluminum.
- Folds quickly and compactly for easy transport.
- Max load: 25 kg.
- Tool tray is included.

**TB-WS10C****Premium****Sliding thru-axle adaptor**

- Spare parts for TB-WS10.
- Accept 12 mm x 100 mm front dropout and 12 mm x 142 mm rear dropout spacing.

**TB-WS35****2 in 1 wall & bench mount work stand**

- Designed to be easily mounted to post, wall, bench and flat surface.
- Adjustable linkage clamp allows the bike positioned at any angle.
- Max load: 30 kg.

**TB-WS10A****Premium****Sliding axle adaptor w/ quick release**

- Spare parts for TB-WS10.
- Quick release is easy to mount the dropouts.
- Available for road bikes with axle 9 mm x 100 mm front dropout and axle 9 mm x 130 mm rear dropout. (It is also available for other bikes which meet the above sizes.)

**TB-WS10B****Premium****Sliding thru-axle adaptor**

- Spare parts for TB-WS10.
- Available for thru axle 15 mm x 100 mm front dropout and thru axle 20 mm x 100 mm front dropout.



Super B chain cleaner is to clean all speed chains without removing it.

- Equipped with magnetic pad to collect metal particles.
- Features with replaceable brushes and sponge and 3 bristle rollers deeply clean dust, grit and debris.
- Updated with increasing the planted hair to improve the performance of chain cleaning.
- Recommended to work with environmentally friendly degreaser TB-3225.



TB-3208, TB-32800, TB-32900

UPDATED

#### Chain cleaner set

- Brush is designed w/o teeth cog to reduce the resistance when chain is feeding through the chain cleaner.
- 2 side plates are removed to help to observe clearly when chain is getting through.
- Plastic axis is used to avoid the issue of rusted metal after using degreaser of chain cleaning solutions.

#### Spec:

TB-3208 Chain cleaner:  
Chain cleaner x 1.

TB-32800 Chain clean set:  
Bike folding brush TB-1711 x 1.  
Chain cleaner TB-3208 x 1.

TB-32900 Chain maintenance set:

Bike folding brush TB-1711 x 1.  
Chain cleaner TB-3208 x 1.  
Chain lube 5 ml TB-3230 x 1.  
Environmental friendly degreaser 120 ml TB-3225 x 1.




TB-32950

UPDATED

#### Versatile cleaning kit

- Functional Super B brushes and cleaning tool packed with a take-alone net bag.
- Extraordinary cleaning tool kit for maintaining chain, freewheel, chainring, derailleurs, tire, etc.
- Contents: brushes TB-1708, TB-1709, TB-1710, TB-1711 and chain cleaner TB-3208.

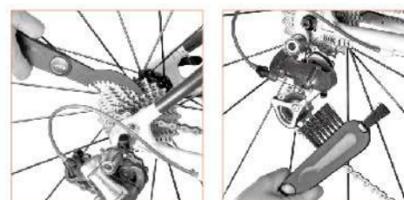

TB-1718

#### 2 in 1 brush

- Multi-function detachable brush design with environmentally friendly concept.
- Includes 2 soft(white) and 2 hard(black) brushes to clean different parts of bicycle.
- Hard brush(black) is to clean tire, chainring, freewheel, rim...  
Soft brush(white) is to clean frame without damage the surface.



TB-1711 PAT.

#### Bike folding brush

- Features with folding compactly design which is easy for storage.
- Two brush heads with nylon bristles are to clean chains.
- The cog brush end is to get the clogged up mud and mud between cassette sprockets and chains.
- Suits for all types of cycles, including road bikes, mountain bikes etc.



TB-1708

#### Bike cleaning brush

- A dual-material designed brush comes with sponge and scrub brush for muddy dirty surface.



TB-1709

#### Bike cleaning brush

- To clean frame and tire.
- A tapered shape brush for narrow space.



TB-1710

#### Bike cleaning brush

- O-shaped brush is to clean tire, frame tube or other tube surface.



TB-3230

TB-3235

TB-3230

#### Chain lube

- Chain lube suits for all-weather and dirty environments and keeps chain well lubricated at race speeds.
- Spec: 5 ml, 30 pcs / counter display box.

TB-3235

#### Poly grease

- The non-soap base and long-lasting lubricant, thickened by polyurea, can reduce friction and wear in the bearing being lubricated under various operation condition and protect against rust and corrosion.
- Spec: 5 ml, 30 pcs / counter display box.



TB-3256

#### Anti-slip compound

- Designed to create friction and reduce slippage between clamped carbon fiber surface.
- Eliminates the need to over tighten clamps to secure the connections.
- Spec: 5 ml / bag, 100 bags /counter display box.



TB-3226

#### Chain lube

- Chain lube suits for all-weather and dirty environments.
- Lubricates bicycle chains well at race speeds.
- Keeps chains out damp and dust to prevent damage and ensures superior lubricating performance.
- Spec: 120 ml / bottle, 12 bottles / counter display box.



TB-3225

#### Environmentally friendly degreaser

- The degreaser is designed with specially formula clearly liquid for using in the chain cleaner.
- The cleaning liquid is perfect to use with Super B chain cleaner TB-3208.
- Quickly removes the grease and grime buildup, without damage to plastic or rubber parts.
- Spec: 120 ml / bottle, 12 bottles / counter display box.

**TB-TL01****Tire lever**

- Detachable design is easy for storage and carrying on ride.
- Set of 3 pcs.

**Economical****TB-TL05****Tubular tire lever**

- The front edge of orange lever is specially designed to remove the tubular and also regular tire from rim easily.
- Black lever is to remove residual glue on tubular rim easily.
- Set of 3 pcs, 2 orange levers, 1 black remover.

**TB-TL08, TB-TL18****Pro tire lever tool**

- Designed to remove and install tires on the rim, especially for narrow tires which is very tight to install / remove.
- Detachable lever can be hooked on the spoke leaving hands free for the second lever.
- Handy, ergonomic and long shape is easy to use.
- Spec:  
TB-TL08: set of 2 different tools.  
TB-TL18: 20 sets / countertop display box.

**TB-TL15****Large tire lever**

- Super long levers provide great leverage.
- Nylon made for hardness and can remove the tire from the rim easily.
- Set of 2 pcs.

**TB-5566 PAT****Steel core tire lever**

- Heat-treated high grade steel core comes with nylon covered for superior durability and prevents the damage of inner tube.
- Set of 3 pcs.

**TB-5568, TB-5569****Tire lever**

- Made of industrial plastic and designed in unique shape for strengthening the structure of the tire levers.
- Wide and flat, compact and lightweight, the greatest take-along lever.
- Strong enough to remove some of the toughest tires, including most of tubeless tires in the world!
- Spec:  
TB-5568: set of 3 pcs.  
TB-5569: 105 pcs / countertop display box.

**TB-TL20****Professional tire lever**

- Made of heat-treated high grade steel for hardness.
- A tip with dual density molded handle is particularly contoured for good leverage, comfort and control to easily remove the tire from rim.
- The tire can be removed just with two levers.
- Fits to most tires and especially for stubborn tires.
- Set of 2 pcs.

**TB-VC20****60 mm valve extenders**

- Designed to extend your Presta valves by 60 mm.
- Set of 2 pcs.

**TB-VC10****Valve core tool**

- Small and handy tool is designed to remove and install Schrader valve, Presta valve cores and Presta valve extender.

**TB-1118****Patch repair kit**

- No glue needed!
- The self-adhesive patches repair kit stretches, twists, flexes, and turns along with the tube.
- Each kit is packaged in a small plastic kit with sandpaper for cleaning the tube and instructions.
- Packed in a 60-kit countertop display box.
- Contents:  
Self-adhesive patch x 6  
Sandpaper x 1

**TB-FP08 PAT.****Clever CO2 inflator**

- Auto control valve releases the air of CO2 cartridge by intuitional design.
- Precision CNC machined.
- Compatible with Presta and Schrader valve.

**TB-FP09****CO2 cartridge holder**

- 2 threaded CO2 cartridge allowed.
- Mounted on frame by bottle cage screws.

**TB-RT05****Removing tire tool for city bike**

- Time saver to replace the tire / tube of bikes without removal of wheel.
- Especially for city bikes with closed chain guard, rear wheel with drum brake system or some internal gear hub.
- Also available for other type brakes, V-brake or Caliper brake.
- Durable for shop daily use.
- Long ergonomic handles provide excellent grip and leverage.
- Fits steel frame city bikes only, not suitable for aluminum frame.

**TB-1120, TB-1121****Patch repair kit**

- Each kit is packed in an innovative, crocodile head-shaped plastic case with sandpaper for sanding the tube.
- With O ring for achieve hanger function.
- It is a perfect match, a must for riders.
- Packed in a 20-kit countertop display box.
- Contents:

- TB-1120:  
Tire lever x 2  
Self-adhesive patch x 6  
Sandpaper x 1

**TB-1121:**

- Tire lever x 2  
Round patch x 6  
Glue x 1  
Sandpaper x 1





### TB-HB100

Professional hub cone wrench set

- Includes the most common size of hub from 13 to 19 mm (TB-HB13~TB-HB19).



### TB-HB13~TB-HB22

Professional hub cone wrench

- Made by laser cutting for precision size and heat-treated high-grade steel Cr-Mo is made for consistent quality.
- Specifically chamfering edge designed for easy access.
- Dual density molded handles are particularly contoured for leverage, comfort and control.

Spec:  
 TB-HB13: 13 mm. TB-HB14: 14 mm. TB-HB15: 15 mm. TB-HB16: 16 mm.  
 TB-HB17: 17 mm. TB-HB18: 18 mm. TB-HB19: 19 mm. TB-HB20: 20 mm.  
 TB-HB21: 21 mm. TB-HB22: 22 mm.



### TB-HB24, TB-HB25, TB-HB26, TB-HB28

Double-ended cone wrench

- Compact wrenches are designed for professional users, home and traveling mechanics.
- Ideal to take along for quick repair.
- Precision size, made of Cr-Mo steel, heat-treated for durable service.

Spec:  
 TB-HB24: 13 x 14 mm for hub cone. TB-HB25: 13 x 15 mm for hub cone.  
 TB-HB26: 15 x 16 mm for hub cone. TB-HB28: 17 x 18 mm for hub cone.



### TB-8648~TB-8654

Hub cone spanner

- Economical hub cones spanners are designed for riders and home mechanics.
- Made of heat-treated high grade steel for hardness.
- Vinyl dipped handle provides with comfortable holding.

Spec:  
 TB-8648: 13 mm. TB-8649: 14 mm. TB-8650: 15 mm. TB-8651: 16 mm.  
 TB-8652: 17 mm. TB-8653: 18 mm. TB-8654: 19 mm.



### TB-HB50

Lockring wrench

- Suitable for most lock-rings of bottom brackets, easy for assembly and suitable for racing or time trial bike especially.
- Made of heat-treated high grade steel for hardness, laser cutting for accuracy.
- Dual density molded handle is particularly contoured for leverage, comfort and control.



### TB-HB08

Double-ended hub cone wrench

- It's a 28 / 18 mm wrench, especially designed for Shimano® (HB-M976 / M970 / M975 / M776 / M810 and WH-M975 / M776).
- Made by laser cutting for precision size and heat-treated high-grade steel Cr-Mo is made for durable service.
- Ideal for professional users and home mechanics.



### TB-HB10

Double-ended wrench

- Made by laser cutting for precision size and heat-treated high-grade steel Cr-Mo for durable service.
- Ideal for professional users and home mechanics.
- Spec: 32 / 36 mm is especially designed for Shimano® Dynamo hub.



### TB-8616

Hub cone spanner

- Made of high grade and heat-treated steel, SK5, for hardness.
- Spec: 13 x 14 x 15 x 17 mm.
- Set of 2 pcs.



### TB-TH20

T-shaped chainring nut wrench

- T40 / hex 6 mm / chainring nut wrench.
- Perfect to use with T-shaped wrench TB-TH10 for the chainring nut.
- Also available to use on other components screwed with T40 / hex 6 mm bolts.



### TB-BP10

Campagnolo® bearing puller and bearing installation set

- Super B special designed solution to install and remove the pressed bearing from Campagnolo® and Fulcrum® Ultra-Torque™ cranks.
- Super B installation tool prevents damage to the bearing and cranksets, so you neither tap the bearing nor use with a hammer.



### TB-8645

Heavy duty axle & pedal vise

- It's used in a bench vise to hold hub axle / pedal spindles prevent it from turning.
- 3 different diameter openings accept hub axle or spindle with maximum Ø 20 mm.
- The bridge spring made of hardened spring steel and aluminum jaws won't damage threads.
- A must for every mechanics.



### TB-TH10

T-shaped wrench

- T30 / hex 5 mm / T30.
- Perfect to use with chainring nut wrench TB-TH20 for the chainring nut.
- Also available to use on other components screwed with hex 5 mm / T30 bolts.



### TB-BP20

Campagnolo® bearing puller and bearing installation set

- Super B special designed solution to install and remove the pressed bearing from Campagnolo® Power-Torque™ cranks.
- Super B installation tool prevents damage to the bearing and cranksets, so you neither tap the bearing nor use with a hammer.



### TB-6715

Chainring nut wrench

- Double-ended economical chainring nut wrench is used to tighten or loosen chainring nuts and securely holds the slotted nut to prevent spinning.
- Fit most slotted-type nuts.
- Includes box wrench 9 mm and 10 mm.

Thin, delicate and multifunctional folding tools come with perfect fit, finish and light weight as an essential partner when you are riding, racing or training.

**TB-9600****7 in 1 folding tool**

- 2.5 / 3 / 4 / 5 / 6 mm hex key wrench.
- Phillips 2 and slotted 5 screwdrivers.

**TB-9855 PAT.****9 in 1 folding tool**

- 2 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Spoke wrench 3.3 mm.
- Phillips 1 screwdriver, T25.
- One-piece forged bits are for superior durability.

**TB-9860 PAT.****6 in 1 folding tool**

- 3 / 4 / 5 / 6 mm hex key wrench.
- Spoke wrench 3.3 mm.
- Phillips 2 screwdriver.

**TB-FD10****7 in 1 folding tool**

- 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1 screwdriver.
- Tire lever x 2.
- One-piece forged bits are for superior durability.

**TB-FD20****18 in 1 folding tool**

- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1 screwdriver, T25 / T30.
- Tire lever x 2.
- Pin holder.
- W/ vinyl housing.
- Chain rivet extractor with spoke wrench 3.2 / 3.5 / 3.3 / 3.5 mm.
- One-piece forged bits are for superior durability.

**TB-FD65****9 in 1 Torx® folding tool**

- T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30.

**TB-9755****4 in 1 folding tool**

- 4 / 5 / 6 mm hex key wrench, T25.

**TB-9625****10 in 1 folding tool**

- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 2, slotted 6 screwdrivers and T25.

**TB-9865 PAT.****6 in 1 folding tool**

- 4 / 5 / 6 / 8 mm hex key wrench.
- Spoke wrench 3.3 mm.
- Phillips 1 screwdriver.
- One-piece forged bits are for superior durability.

**TB-9870 PAT.****10 in 1 folding tool**

- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Spoke wrench 3.3 mm.
- Phillips 2 and slotted 5 screwdrivers.

**TB-FD30****7 in 1 folding tool**

- 3 / 4 / 5 / 6 mm hex key wrench.
- Phillips 2 screwdriver.
- Tire lever x 2.

**TB-FD40****17 in 1 folding tool**

- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1, slotted 3 screwdrivers, T25.
- Chain rivet extractor with spoke wrench 3.2 / 3.5 / 3.3 / 3.5 mm.
- Tire lever x 2.

**TB-9751****4 in 1 folding tool**

- 4 / 5 / 6 mm hex key wrench, Phillips 2.

**TB-9760****8 in 1 folding tool**


- 2.5 / 3 / 4 / 5 / 6 mm hex key wrench.
- T25, Phillips 2 and slotted 6 screwdrivers.

Super B new collections!

The NEW folding tool features with CO2 inflator.

The inflator is equipped with control valve to control the volume of air of CO2 to get in the tube.

Attached on the holder for convenient storage and using.



#### TB-FD70

15 in 1 folding tool

- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1 / 2, slotted 3 / 4 screwdrivers.
- T10 / T25 / T30.
- CO2 inflator fits Presta and Schrader valves.



#### TB-FD60

10 in 1 folding tool

- 2 / 3 / 4 / 5 / 6 mm hex key wrench, Phillips 2 screwdriver and T25.
- CO2 inflator w/ control valve.
- Tire lever x 2.



#### TB-FD45

21 in 1 folding tool

- 3 / 4 / 5 / 6 mm hex key wrench.
- Phillips 2 and slotted 6 screwdriver.
- 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm box wrench.
- Bottle opener, T25 / T30.
- Spoke wrench 3.2 mm / 3.5 mm.



#### TB-FD50

21 in 1 folding tool

- 2.5 / 3 / 4 / 5 / 6 mm hex key wrench.
- Phillips 2 screwdriver.
- 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm box wrench.
- Bottle opener, T25.
- Chain rivet extractor.
- Spoke wrench 3.2 mm / 3.5 mm.



A functional, compact, fashion and precision multi tool is a must and companion for a cyclist.

Super B offers a variety of collections to help you get through a wide range of trailside repair.

One pieced forged bit provides high precision and long lasting.



#### TB-FD58

14 in 1 folding tool

- 15 mm pedal wrench.
- 2 / 2.5 / 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1 / 2 and slotted 4 screwdriver, T10 / T25.
- Tire lever x 2.



#### TB-FD55

15 in 1 folding tool

- 15 mm pedal wrench.
- 3 / 4 / 5 / 6 / 8 mm hex key wrench.
- Phillips 1 screwdriver and T25.
- Multi-function chain rivet extractor w/ 10 mm box wrench, spoke wrench 3.2 / 3.5 & Mavic® 5.65 mm (M7), brake piston press and bottle opener.



#### TB-9786

10 in 1 commuter daily folding tool

- 3 / 4 / 5 / 6 mm hex key wrench
- Phillips 2 screwdriver, slotted 4 screwdriver and T25.
- 2 pcs of tire lever and 6 self-adhesive patches.



#### TB-9785

14 in 1 commuter daily folding tool

- This advanced 14 in 1 folding tool set is the best partner for every cyclist.
- Comes with the most useful bike tools on your ride.
- Innovatively equipped with 2 pcs of tire lever and 6 pcs self-adhesive patches.
- Also includes 3 / 4 / 5 / 6 mm hex key wrench, Phillips 2 and slotted 4 screwdriver and T25.
- Chain rivet extractor w/ spoke wrench 3.2 / 3.5 mm and Mavic® 5.65 mm (M7).



#### TB-FD08

9 in 1 rudder multifunctional keychain

- Hex 3 / 4 / 5 / 6 and Phillips 2.
- Spoke wrench 3.2 / 3.5 mm.
- 10 mm box wrench.
- With a keychain.
- 1 pc / PET case, 20 pcs / counter color box.





**TB-DS10**  
Digital scale

- The versatile digital scale is designed to measure accurate weight of bikes, frames and components.
- Perfect to work with Super B work stands.
- Measures weight range from 20g – 50 kg with kg / lb / oz unit conversion.
- Accurate to ± 5 g from 20 g to 10 kg, ± 10 g from 10 kg to 50 kg.
- Tare and auto power-off function.
- Requires 2 AAA batteries that are not included.



**TB-UP10** **NEW**  
Utility Pick Set 3pcs / set

- Picks with variety angles provide perfect assistance for mechanic daily work.



**TB-DS20**  
Tabletop digital scale

- Specially design for accurate measurement of bike parts and components.
- Measures weight from 1 g to 3 kg, with g / oz unit conversion.
- Accurate to within 1 g.
- Tare and auto power-off function.
- Requires 1 \* 3V (CR2032) battery that is not included.



**TB-PT10**  
Portable workbench

- Features easy fold up for storage and transportation.
- Designed with sized holes and ditches for putting tools and accessories.
- The foldable legs are made of steel for more stable operation.
- Dimension: L83 cm x W49 cm x H90 cm.
- Max load: 50 kg.
- Tools are not included.



**TB-7518, TB-7528, TB-7538, TB-7548**  
Screwdrivers

- Made of high grade steel, heat-treated for hardness.
- Ergonomically designed grips provide with efficient and comfort for tightening or loosening bolts.
- Spec:  
 TB-7518: Phillips 0, length 75 mm.  
 TB-7528: Phillips 2, length 100 mm.  
 TB-7538: Slotted 3, length 75 mm.  
 TB-7548: Slotted 6, length 100 mm.



**TB-4518**  
7" Combination pliers



**TB-4520**  
8" Long nose pliers



**TB-4515**  
6" Diagonal cutting nippers



**TB-4525**  
10" Waterpump box joint



**TB-1914**

- 20" magnetic rack
- Collects tools or small metal parts for storage.
  - Special modular mounting bracket is extendable for more magnetic racks.
  - Powerful permanent magnetic force.
  - Tools on rack are not included.



**TB-SW90**  
Socket wrench

- For 1/2" drive sockets.
- Extra long steel with Super B Premium handle provides great leverage.



**TB-8830**  
Universal wrench

- The 16-32 mm (5/8"-1-1/4") universal wrench is made of Chrome Vanadium, forged and heat-treated for hardness.
- Holds freewheel and locking removers securely for removal and installation.
- Heavy duty for daily shop use.
- Vinyl dipped and long handle is for superior leverage and comfort.



**TB-1108**

- Measure tape
- Handy and portable in tool kit, capable of measuring in both Metric and Imperial units upto 3M / 10 FT.



**TB-1912**

- Magnetic collector
- 6" (15 cm) stainless steel tray with rubber coated magnets in the base.
  - Keeps small metal parts and tools all in place.



**TB-8825**

- 12" adjustable wrench
- Perfectly matched knurl and teeth of jaw for working smoothly.
  - Laser-etched metric measuring scale for easy reading.
  - Made of high-grade steel, heat-treated for excellent durability.
  - Chrome finish for outstanding rust resistance.
  - Jaws opens up to 34 mm.



**TB-1100**

- Dead blow hammer
- Steel structure and includes steel shot.

## ASIA

**China**

Shakeland( Kunshan) Bag Co.Ltd  
Floor 4, Boshi Building, No. 89 Baoyi Road,  
Kunshan, Suzhou, Jiansu Province,  
China 215300  
Tel: +86 0512 5033 8908  
Tel: 18962632392 (wechat)  
Fax: +86 0512 5765 5730  
Url: www.shakeland.com

**Hong Kong**

Chung Yung Cycle Co.  
Flat C, M/F, Lung Ha Bldg,  
122-130 San Fung Avenue,  
Sheung Shui, N.T., Hong Kong  
Tel: +852 2670 3639  
Fax: +852 2679 5602  
Url: www.hkbicycle.com  
**Exclusive distributor**

**Korea**

MBS Corporation  
180 Chasang-Ro, Uichang-Gu,  
Changwon City Gyeongnam 51392  
Korea R.O.K.  
Tel: +82-55-265-9415-9418  
Fax: +82-55-265-9419  
Url: www.elfama.com  
**Exclusive distributor**

**Malaysia**

EVANDA SDN BHD.  
153 (No.1), Jalan TIAJ 2/1,  
Taman Industri Alam Jaya,  
42300 Bandar Puncak Alam  
Selangor, Malaysia  
Tel: +603.6038 8928/8929  
Fax: +603.6038 9929  
Url: www.evanda.com.my  
**Exclusive distributor**

**Singapore**

The Bike Settlement  
BIK 1002 Jalan Bukit Merah  
#05-18 Singapore 159456  
Tel: +65 6278 9983  
Fax: +65 6278 8918  
Url: www.thebikesettlement.com  
**Exclusive distributor**

**Taiwan**

LIKE HOME INTERNATIONAL ENT. Co.,Ltd.  
No.489, Sec.2, Chung-Cheng Road, Chang-Hua,  
Taiwan, (500)  
Tel: +886-4-7250629  
Fax: +886-4-7244221  
Url: www.likehome.com.tw

**Thailand**

Probike Co.,Ltd.  
237/2 Rajdumri Rd. Lumpini.  
Patumwan, Bangkok, Thailand 10330  
Tel: +662-253-3384  
Fax: +662-254-1077  
Url: www.probike.co.th

## OCEANIA

**Australia**

The Bicycle Corporation Pty. Ltd  
10 Grange Road, Moorabbin Airport,  
Victoria 3194, Australia  
Tel: +61-3-9518-5400  
Fax: +61-3-9558-1354  
Url: www.bikecorp.com.au  
**Exclusive distributor**

NORTH  
& SOUTH AMERICA**Argentina**

Carlos Karabitian  
Av.Ciudad de Valparaiso 4815  
CP: X5016FHM Cordoba Argentina  
Tel: +54 351 4936060  
Url: www.karabitian.com.ar  
**Exclusive distributor**

**Brazil**

LM BIKE  
Rua Maria Guimarães, 1020  
Bairro Maria Fernanda I  
Lagoa da Prata, MG, Brazil  
Tel: +55 800 970 4044  
Url: www.lmbike.com.br  
**Exclusive distributor**

**Canada**

LTP Sports Group Inc.  
1465 Kebet Way Port Coquitlam, BC V3C 6L3  
Canada  
Tel: +604-552-2930  
Fax: +604-552-2931  
Url: www.livetoplaysports.com

**Chile**

Andes Industrial  
Santa Elena 1511, Santiago, Chile  
Tel: +56 2 26503100  
Url: www.andesindustrial.cl  
**Exclusive distributor**

**Colombia**

HA Bicicletas SA  
Calle 14N° 52A-187 Medellin Colombia  
Tel: +574 285 50 40  
Fax: +574 255 33 43  
Url: www.habicicletas.com

**USA**

Hawley-Lambert Cycling (HLC)  
South Carolina (US Headquarters)  
1181 South Lake Drive Lexington, SC 29073  
United States  
Tel: +18885222453  
Fax: +18885222453  
Url: www.hlc.bike/us

EUROPE, RUSSIA  
& MIDDLE EAST**Belgium**

Dewo-Europe NV  
Steenstraat 16, 1570 Vollezele  
Belgium  
Tel: +32 (0) 54 31 7780  
Fax: +32 (0) 54 56 7099  
Url: www.qt-cycletech.com  
Url: www.dewo-europe.com  
**Exclusive distributor**

**Czech Republic**

Cyklo Profi, S.R.O.  
Vysokomýtská 427 Holice v Čechách  
Czech Republic  
534 01  
Tel: +420 777 275 499  
Fax: +420 608 296 508  
Url: www.cykloprofi.cz  
**Exclusive distributor**

**Israel**

4Bicycle (2014) L.T.D.  
3 Zachariya Gluska st, Rishon Lezion,  
Israel 7565003  
Tel: +972-3-6735505

**France**

CGN LE SENS DV DETAIL  
167 Boulevard Salvador Allende, 44800  
Saint-Herblain, France.  
Tel: +33-02-40-920095  
Url: www.cgnfrance.com  
**Exclusive distributor**

**Finland**

Oy Huntteri Ab  
Lukkosepänkatu 4,  
20320 Turku, Finland  
Tel: +358-20-799-1200  
Fax: +358-20-799-1219  
Url: huntteri.fi  
**Exclusive distributor**

**Germany**

Messingschlager GmbH & Co.KG  
Hassbergstr 45, 96148 Baunach,  
Germany  
Tel: +49 (0) 9544 9444 45  
Fax: +49 (0) 9544 9444 40  
Url: www.messingschlager.com  
**Exclusive distributor**

**Hungary**

Messingschlager GmbH & Co.KG  
Hassbergstr 45, 96148 Baunach,  
Germany  
Tel: +49 (0) 9544 9444 45  
Fax: +49 (0) 9544 9444 40  
Url: www.messingschlager.com  
**Exclusive distributor**

**Netherland**

Messingschlager GmbH & Co.KG  
Hassbergstr 45, 96148 Baunach,  
Germany  
Tel: +49 (0) 9544 9444 45  
Fax: +49 (0) 9544 9444 40  
Url: www.messingschlager.com  
**Exclusive distributor**

**Italy**

Mandelli SRL  
Via Tommaso Grossi 5, Carate  
Brianza 20841(MB) Italy  
Tel: +39 0362 1797800  
Url: www.mandelli.net

**Poland**

Firma Handlowa „SAKS” Sp. J.  
Ul. Nowowiejskiego 33 b  
PL 83-000 Pruszcz Gdański  
Tel: +48 58 682-20-87  
Fax: +48 58 683-28-48  
Url: www.fhsaks.pl  
**Exclusive distributor**

**Romania**

Messingschlager GmbH & Co.KG  
Hassbergstr 45, 96148 Baunach,  
Germany  
Tel: +49 (0) 9544 9444 45  
Fax: +49 (0) 9544 9444 40  
Url: www.messingschlager.com  
**Exclusive distributor**

**Russia**

Veloolimp LTD  
Russia, 111524, Moscow,  
UL. Elektrodnaya,  
D.2STR. 12-13-14  
Tel: +7-495-788-19-52  
Fax: +7-495-788-19-52  
Url: www.veloolimp.com

**Slovakia**

Sloger, j.s.a.  
Čsl. Armády 6 · 93401 Levice  
Tel: 00421 911 648 824  
Url: www.sloger.sk  
**Exclusive distributor**

**Spain**

Industrias VICMA S.A.  
Carretera Nacional 340 km 619,4  
Apdo. de correos 25-30850 Totana, Murcia  
(España)  
Tel: +34 968 424 752  
Fax: +34 968 422 778  
Url: www.vicma.es

**Turkey**

ASLI Bisiklet  
Hobyar Mah. Dervisoglu Sokak No:9/A  
34112 Sirkeci-Fatih-Istanbul  
Tel: +90 212 5273563  
Url: www.aslibisiklet.com

**Ukraine**

Veloportal company  
49/2 Peremohy Avenue, Build L.  
03057 Kyiv, Ukraine  
Tel. +38-044-331-5090  
Url: www.veloportal.com.ua

**United Kingdom / Ireland**

Moore Large & Co Ltd  
Sinfin Industrial Estate, Sinfin Lane, Derby,  
DE24 9GL, UK.  
Tel: +44 01332 274252  
Url: www.moorelarge.co.uk

Item No	PAGE	Item No	PAGE	Item No	PAGE	Item No	PAGE	Item No	PAGE
TB-1005	35	TB-1320	1	TB-1929B	37	TB-4525	55	TB-7645	28
TB-1010	36	TB-1325	1	TB-1930	18	TB-4574	16	TB-7650	28
TB-1015	36	TB-1331	1	TB-1935	9	TB-4585	16	TB-76160	28
TB-1018	36	TB-1334	1	TB-1936	11	TB-5501	26	TB-76165	28
TB-1020	36	TB-1445	30	TB-1937	11	TB-5502	26	TB-7705	28
TB-1021	36	TB-1455	34	TB-1938	9	TB-5510	26	TB-7715	28
TB-1025	36	TB-1465	30	TB-1939	9	TB-5516	25	TB-7811	25
TB-1030	36	TB-1465	34	TB-1940	15	TB-5517	25	TB-7812	25
TB-1035	36	TB-1633	38	TB-1940A	15	TB-5518	25	TB-7813	25
TB-1045	36	TB-1635	38	TB-1941	11	TB-5519	25	TB-7814	25
TB-1050	36	TB-1708	46	TB-1942	12	TB-5523	26	TB-7815	25
TB-1055	36	TB-1709	46	TB-1943	12	TB-5526	26	TB-7817	25
TB-1060	35	TB-1710	46	TB-1944	12	TB-5540	26	TB-8015	34
TB-1065	35	TB-1711	45	TB-1945	10	TB-5550	26	TB-8018	34
TB-1066	35	TB-1718	45	TB-1946	12	TB-5560	26	TB-8075	15
TB-1067	37	TB-1812	38	TB-1947	12	TB-5566	47	TB-8455	32
TB-1068	35	TB-1817	24	TB-1948	10	TB-5568	47	TB-8616	49
TB-1069	37	TB-1817A	24	TB-1957	41	TB-5569	47	TB-8625	32
TB-1071	37	TB-19000	14	TB-1959	41	TB-5570	26	TB-8645	50
TB-1073	37	TB-19001	37	TB-1964	38	TB-5596	26	TB-8648	49
TB-1074	35	TB-19002	37	TB-1965	39	TB-5598	26	TB-8649	49
TB-1075	35	TB-19003	37	TB-1965B	39	TB-6485	31	TB-8650	49
TB-1076	35	TB-1900B	37	TB-1965C	39	TB-6616	31	TB-8651	49
TB-1080	35	TB-1901	14	TB-1967	39	TB-6617	31	TB-8652	49
TB-1085	36	TB-1902	14	TB-1968	39	TB-6618	31	TB-8653	49
TB-1090	36	TB-1903	14	TB-1971	2	TB-6715	50	TB-8654	49
TB-1095	36	TB-1904	14	TB-2618	27	TB-7253	27	TB-8825	56
TB-1100	56	TB-1905L/R	14	TB-2628	27	TB-7254	27	TB-8830	56
TB-1103	22	TB-1906L/R	14	TB-2638	27	TB-7256	27	TB-8860	30
TB-1108	56	TB-1907	41	TB-2648	27	TB-7518	55	TB-8866	30
TB-1118	48	TB-1908	41	TB-3208	45	TB-7528	55	TB-8868	30
TB-1120	48	TB-1908-1	41	TB-3225	46	TB-7535	27	TB-8911	34
TB-1121	48	TB-1909	41	TB-3226	46	TB-7538	55	TB-8911A	34
TB-1130	9	TB-1909-1	41	TB-3230	46	TB-7540	27	TB-8912	34
TB-1131	9	TB-1912	56	TB-3235	46	TB-7545	27	TB-8913	34
TB-1161	10	TB-1914	56	TB-3256	46	TB-7548	55	TB-8919	34
TB-1161-1	10	TB-1915-2	38	TB-32800	45	TB-7610	28	TB-8920	34
TB-1161A	10	TB-1915-3	38	TB-32900	45	TB-7615	28	TB-935B	9
TB-1162	25	TB-1917	10	TB-32950	45	TB-7620	28	TB-935D	9
TB-1169	10	TB-1918	2	TB-3305	22	TB-7625	28	TB-935F	9
TB-1169A	10	TB-1919	2	TB-3306	22	TB-7630	28	TB-9600	51
TB-1170	6	TB-1925	11	TB-3323	23	TB-7631	28	TB-9625	51
TB-1180	6	TB-1926	11	TB-3326	23	TB-7632	28	TB-96710	6
TB-1200	24	TB-1926A	11	TB-3327	23	TB-7633	28	TB-9751	52
TB-1205	24	TB-1927A	37	TB-3328	23	TB-7634	28	TB-9755	52
TB-1310	1	TB-1927B	37	TB-3355	22	TB-7635	28	TB-9760	52
TB-1311	1	TB-1928A	37	TB-3370	22	TB-7636	28	TB-9785	54
TB-1313	1	TB-1928B	37	TB-4515	55	TB-7637	28	TB-9786	54
TB-1316A	1	TB-1929A	11	TB-4518	55	TB-7638	28	TB-98150	14
TB-1316B	1	TB-1929A	37	TB-4520	55	TB-7640	28	TB-98150-1	14

Item No	PAGE	Item No	PAGE	Item No	PAGE	Item No	PAGE	Item No	PAGE
TB-9855	51	TB-CR30	31	TB-HK100	1	TB-SW22	26	TB-WS60	44
TB-98550	6	TB-DB10	15	TB-HKS80	1	TB-SW90	56	TB-WS65	43
TB-98555	6	TB-DS10	42	TB-HS30	11	TB-TH05	27	TB-YY05	27
TB-9860	51	TB-DS10	55	TB-HS32	11	TB-TH06	28	TB-YY10	27
TB-9865	51	TB-DS20	56	TB-HS36	11	TB-TH10	50	TB-YY15	27
TB-9870	51	TB-ET05	12	TB-HS40	11	TB-TH20	50	TB-YY20	27
TB-98750	5	TB-ET06	12	TB-HT10	13	TB-TH30	28	TB-YY25	27
TB-98755	5	TB-FD08	54	TB-HT11	13	TB-TH35	28	TB-YY30	27
TBA2000	7	TB-FD10	52	TB-IR20	16	TB-TL01	47		
TBA3000	7	TB-FD20	52	TB-MW40	15	TB-TL05	47		
TBA5000	7	TB-FD30	52	TB-MW50	32	TB-TL08	47		
TBA300	8	TB-FD40	52	TB-MW60	32	TB-TL15	47		
TBA500	8	TB-FD45	53	TB-PB08	0	TB-TL18	47		
TBA800	8	TB-FD50	53	TB-PB08-1	0	TB-TL20	48		
TBA9000	2	TB-FD55	54	TB-PB08-1H	0	TB-TW15	20		
TB-BB10	33	TB-FD58	54	TB-PB08H	0	TB-TW16	20		
TB-BB11	33	TB-FD60	53	TB-PB10	0	TB-TW20	20		
TB-BB15	33	TB-FD65	52	TB-PB10-1	0	TB-TW25	19		
TB-BB16	33	TB-FD70	53	TB-PB10-1H	0	TB-TW30	20		
TB-BB18	34	TB-FP08	48	TB-PB10H	0	TB-TW35-4	19		
TB-BB19	34	TB-FP09	48	TB-PB30	1	TB-TW35-5	19		
TB-BB20	34	TB-FW10	29	TB-PB40	1	TB-TW35-6	19		
TB-BB30	33	TB-FW20	29	TB-PD10	32	TB-TW35-7	19		
TB-BB40	33	TB-FW22	29	TB-PD30	32	TB-TW50	19		
TB-BB41	33	TB-FW30	29	TB-PD35	32	TB-TW51	19		
TB-BP10	50	TB-FW36	29	TB-PD55	32	TB-TW55	20		
TB-BP20	50	TB-FW40	29	TB-PF21	17	TB-TW65	20		
TB-BR10	15	TB-FW50	30	TB-PF22	17	TB-TX06	28		
TB-BR20	15	TB-FW55	29	TB-PF25	18	TB-UP10	56		
TB-CB10	31	TB-HB08	49	TB-PF26	17	TB-VC10	48		
TB-CB20	31	TB-HB10	49	TB-PF30	17	TB-VC20	48		
TB-CC20	22	TB-HB100	49	TB-PF32	18	TB-WC10	2		
TB-CC30	22	TB-HB13	49	TB-PF33	18	TB-WC30	16		
TB-CC40	22	TB-HB14	49	TB-PF35	18	TB-WR10	16		
TB-CC50	21	TB-HB15	49	TB-PF36	17	TB-WR11	16		
TB-CC60	21	TB-HB16	49	TB-PT10	55	TB-WS10	44		
TB-CC65	21	TB-HB17	49	TB-RC10	15	TB-WS10A	44		
TB-CC65A	21	TB-HB18	49	TB-RT05	48	TB-WS10B	44		
TB-CC65B	21	TB-HB19	49	TB-SS10	40	TB-WS10C	44		
TB-CC66	21	TB-HB20	49	TB-SS10A	40	TB-WS11	43		
TB-CC66A	21	TB-HB21	49	TB-SS11	40	TB-WS12	42		
TB-CH10	23	TB-HB22	49	TB-SS20	39	TB-WS20	43		
TB-CH20	23	TB-HB24	49	TB-SS20A	39	TB-WS20A	43		
TB-CH30	24	TB-HB25	49	TB-SS22	39	TB-WS20B	43		
TB-CH35	24	TB-HB26	49	TB-SS30	40	TB-WS30	43		
TB-CP10	30	TB-HB28	49	TB-ST01	25	TB-WS30A	43		
TB-CP15	30	TB-HB50	33	TB-ST11	25	TB-WS35	44		
TB-CP15	33	TB-HB50	49	TB-ST12	25	TB-WS40	42		
TB-CR10	31	TB-HC20	16	TB-SW05	26	TB-WS50	42		
TB-CR20	31	TB-HD05	14	TB-SW20	26	TB-WS55	42		